

MDO-2000E Series

Introduction

GW INSTEK

Made to Measure

GOOD WILL INSTRUMENT CO., LTD.



MDO-2000E series



200/100/70MHz DSO with

Spectrum analyzer and

Dual channel AWG ,DMM ,power supply functionalities

MDO-2000E series

	Spectrum	25MHz Dual CH AWG	5,000 counts DMM	1A/5V power supply
MDO-2000EG	V	V		
MDO-2000EX	V	V	V	V

MDO-2000EX is the only oscilloscope to equip with a DMM and a power supply .

Key Features

- 200/100/70MHz bandwidth selections ;2 or 4 channels
- Real time sample rate for each channel is 1GSa/s (2 channel models)
Maximum real time sample rate is 1 GSa/s (4 channel models)
- Maximum 10M memory depth and VPO waveform display technology
- Waveform update rate up to 120,000 wfms/s
- Maximum 1M FFT provides higher frequency domain resolution measurements
- High pass and low pass filter functions
- 29,000 segmented memories and waveform search functions
- I²C/SPI/UART/CAN/LIN serial bus trigger and decoding function
- Data log function is able to track signal changes up to 100 hours
- 8 " WVGA TFT LCD display
- Network storage function
- Mask test function
- MDO-2000EG equips with a spectrum analyzer and a dual channel 25MHz AWG
- MDO-2000EX equips with a spectrum analyzer ; a dual channel 25MHz AWG;
DMM and power supply.


MDO-2000E



The limitation in the general FFT in the DSO


- The operational logic of FFT function is restricted by the sample rate setting of source channels and FFT calculation points.
- A correct spectrum cannot be observed if the horizontal scale can't be appropriately setup.
- Insufficient calculation efficiency of CPU platform will also restrain oscilloscopes' capabilities in providing FFT measurements.

Comparison between conventional FFT and MDO-2000E's SA function

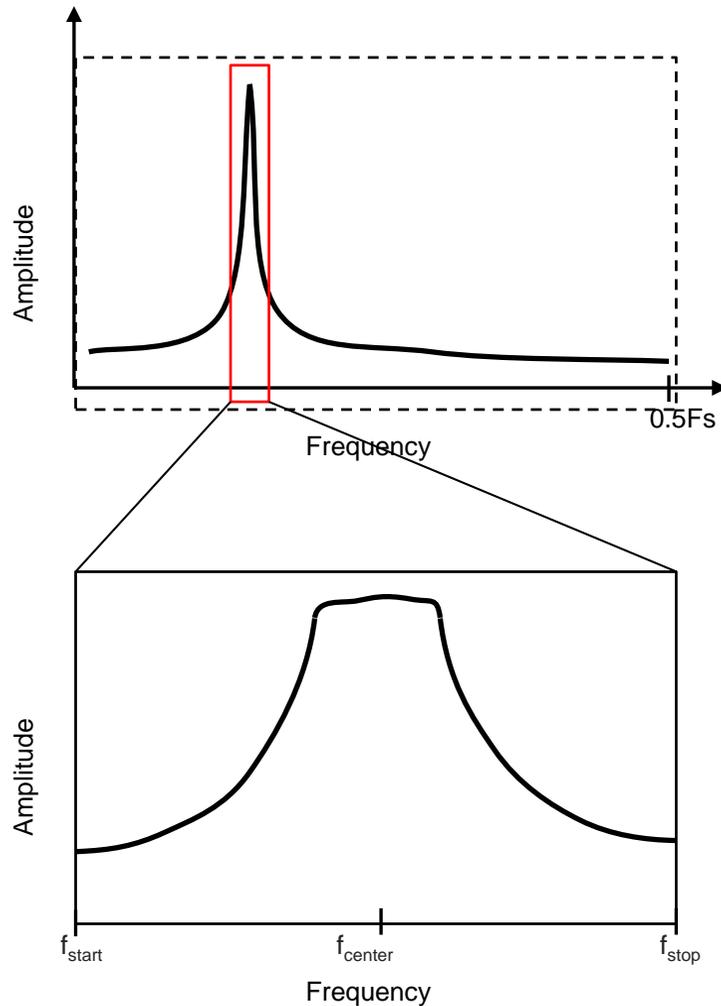

- Conventional DSO's FFT always calculates the entire signal bandwidth up to half the sampling rate (F_s).. However, the insufficient calculation capability can't conduct multi-point FFT calculation. (above figure)
- MDO-2000E analyzes signal spectrum of interest. Compared with oscilloscope' FFT, MDO-2000E series allows engineers to effectively conduct signal measurements on frequency domain. (below figure).

SA display from MDO-2000E

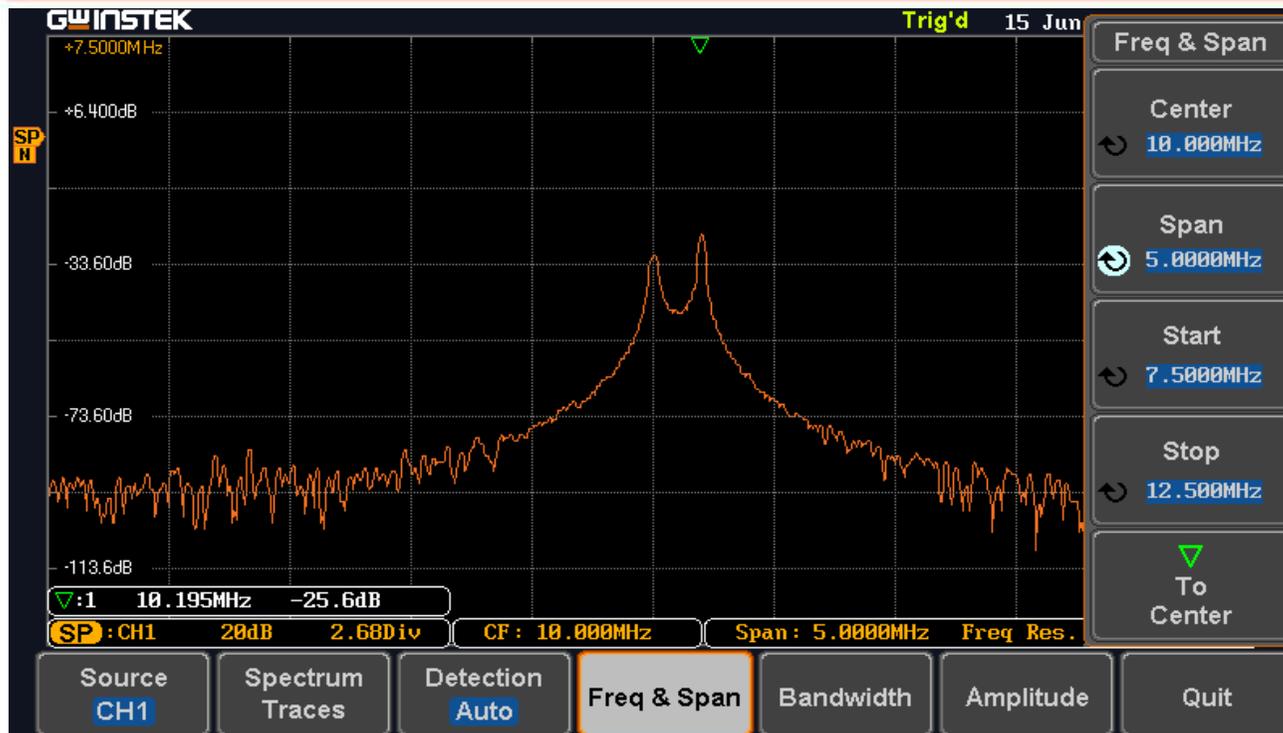


The input signal is FSK
500mV_{pp} sine wave

- f_{\max} : 10.2MHz,
- f_{\min} : 10.0MHz,
- bit rate: 10.0kHz.

Users can directly input Center and Span Frequency by an intuitive and swift setting.
 f_{\max} and f_{\min} can be clearly identified from the screen display by MDO-2000E.


General DSO's FFT display

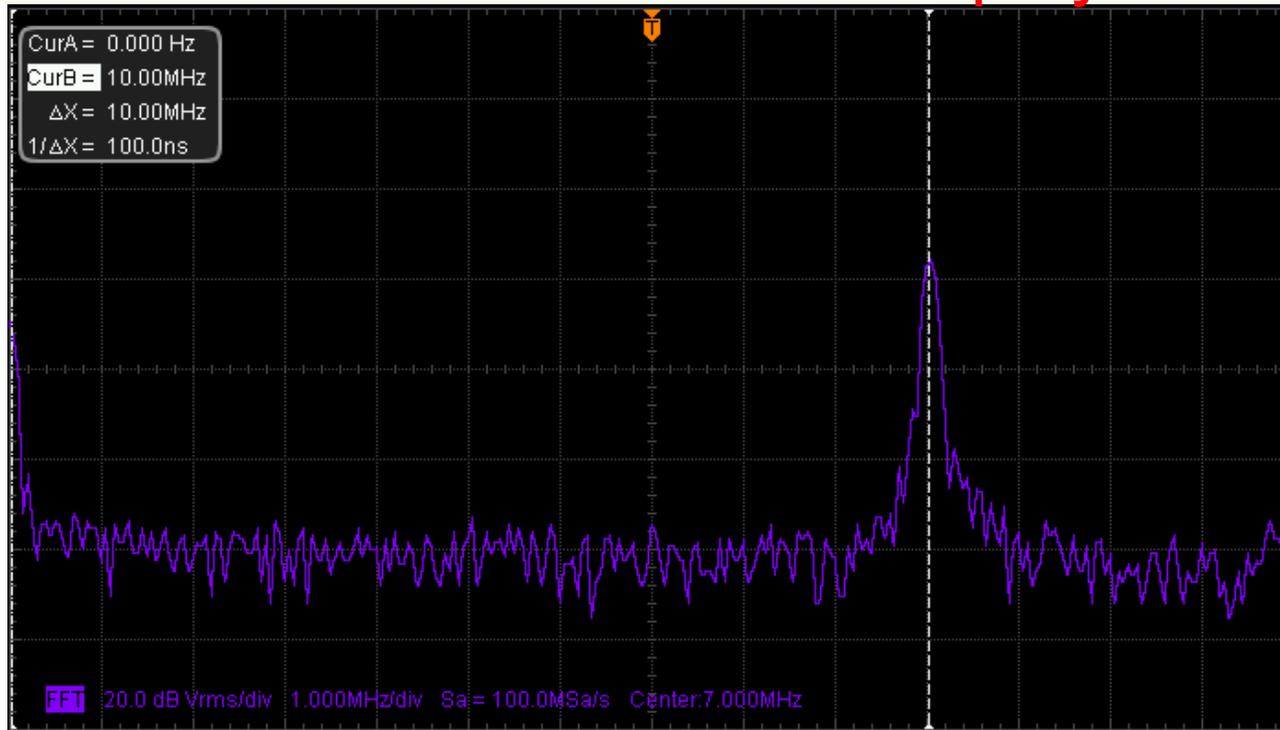

- The boundary started from DC (low frequency signal) and the maximum frequency on the right is half of the sample rate.
- The users can't set Span ,the Span setting for spectrum can only be switched by fixed 1-2-5 multiplying factors
- Only conduct Zoom In/Out calculation on the original FFT spectrum
- The important f_{\max} and f_{\min} of spectrum can't be identified.

Spectrum analyzer introduction

- To enhance original FFT's UI. To provide frequency domain display as the spectrum analyzer.
- Frequency setup allow to set Center/Span or Start/Stop
- The unit of amplitude display is dB .
- Allow to use maker to display the test frequency

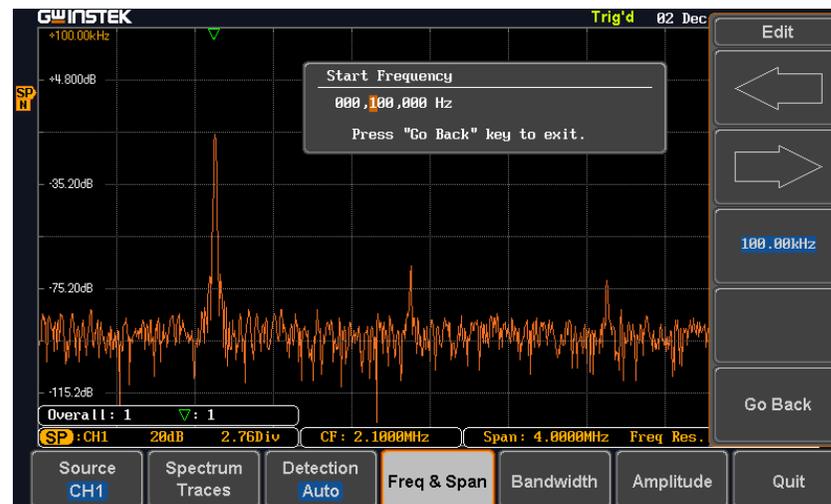

Frequency Setup



The user is allow to set Start Frequency, Stop Frequency, Center Frequency, and Span to intuitively and rapidly identify the desired frequency range

Spectrum trace type setting



In order to allow users to experience genuine Spectrum Analyzer, MDO-2000E also includes Spectrum Trace Type settings (Normal, Max-hold, Min-hold, and Average). Users can freely simultaneously select various Spectrum Traces.

The advantages of SA function in MDO-2000E

1. Compare to normal Spectrum Analyzer ,MDO-2000E is allow to test the frequency below 9kHz and test DC+AC signal. (The applications of less than 9kHz are main in vibration and audio).
2. The test speed is faster than normal Spectrum Analyzer.
3. Users can directly input Center and Span Frequency by an intuitive and swift setting. Frequency components can be clearly identified.


Dual CH 25MHz AWG specifications

Sample Rate	200 MSa/s
Vertical Resolution	14 bits
Max. Frequency	25 MHz
Standard Waveform	Sine, Square, Pulse, Ramp, DC, Noise
Built-in Waveform	Sinc, Gaussian, Lorentz, Exponential Rise, Exponential Fall, Haversine, Cardiac
Output range	20 mVpp to 5 Vpp, HighZ 10 mVpp to 2.5 Vpp, 50 Ω
Output Resolution	1mV
Output Accuracy	2% (1 kHz)
Offset range	± 2.5 V, HighZ ± 1.25 V, 50 Ω
Offset Resolution	1mV
Sine	
Frequency range	100 mHz to 25 MHz
Flatness	± 0.5 dB (relative to 1 kHz)
Harmonic Distortion	-40 dBc
Stray (Non-harmonic)	-40 dBc
Total Harmonic Distortion	1%
S/N Ratio	40 dB
Square/Pulse	
	Square: 100 mHz to 15 MHz
Rise/Fall Time	< 15ns
Overshoot	< 3 %
Duty Cycle	Square: 50% Pulse: 0.4% to 99.6%
Min. Pulse Width	30ns
Jitter	500 ps
Ramp	
Frequency range	100 mHz to 1MHz
Linearity	1%
Symmetry	0 to 100%


Modulation Function List

Modulation Function List						
Carrier Waveform Modulation Type	Sine	Square (Fix Duty)	Ramp	Pulse (Adjustable Duty)	Noise & DC	Arb & Built in Waveform
AM	√	√	√	√	x	√
FM	√	√	√	x	x	x
FSK	√	√	√	x	x	x
sweep	√	√	√	x	x	x

Dual channel 25MHz AWG

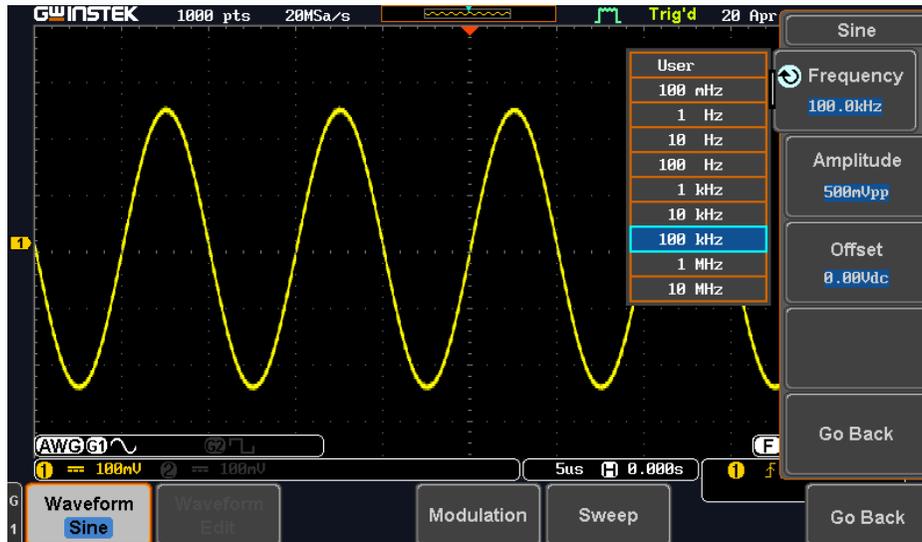

- Dual channel 25MHz arbitrary waveform generator ,which equips the modulation functions
- 13 different waveforms are built-in
- AM/FM/FSK modulation functions

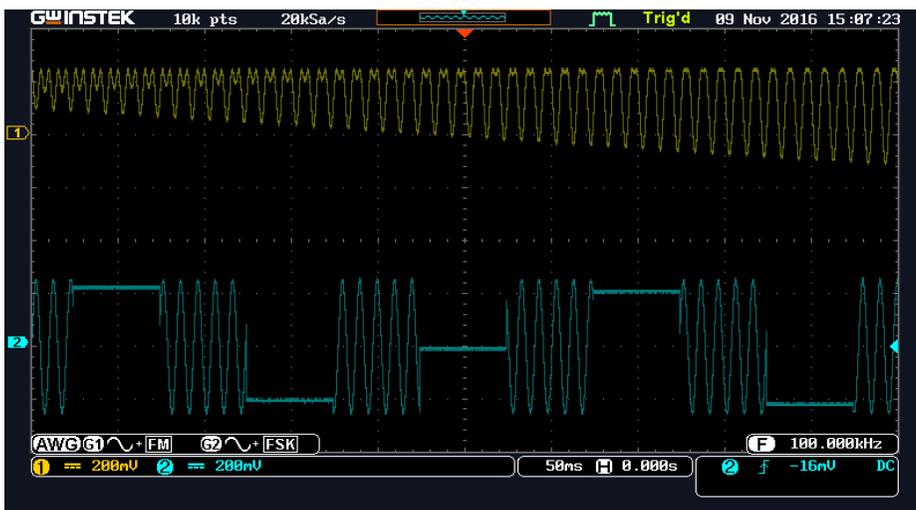

Arbitrary waveform setup



User is allow to load and create arbitrary waveform on the MDO-2000E series .

MDO-2000EX



Front view
Provide 5,000 counts DMM

MDO-2000EX



Back view

(Including dual power supply output and AWG output)

MDO-2000EX-DMM function

MDO-2000EX equips with DMM and power supply.



- DMM provide 5,000 Counts high resolution.
- DMM functions are including ACV;DCV;ACA;DCA;Resistance; Diode and temperature.

- Each DMM setting level is calibrated by precision calibration procedures.
- The DVM of the general oscilloscopes is only the functional extension of Auto measurement, which has a basic measurement error of approximately DC Gain Accuracy 3% and its accuracy cannot compete with the actual DMM.
- The highly accurate DMM can strengthen DSO's capabilities of voltage and current measurement accuracy.

MDO-2000EX-power supply function



- Dual channel DC power supply
 - Continuously Adjustable 1~5V output (0.1V step)
 - Over load protection
-
- Allow to supply power for the development board and IoT (Internet of Things) module of the often used 8051/Arduino/ESP8266/MSP430 in Microprocessors and Microcontrollers experiment courses.


DSO Key features introduction

- 10M memory depth
- Faster waveform update rate of 120,000wfm/s
- 1M FFT
- Waveform search
- Segmented memory
- Provide I2C/SPI/UART/CAN/LIN serial bus trigger and decoding function.
- High pass ,low pass and band pass filter
- MASK function


Key features introduction

- 10M memory depth
- Faster waveform update rate of 120,000wfm/s
- 1M FFT
- Waveform search
- Segmented memory
- Provide I2C/SPI/UART/CAN/LIN serial bus trigger and decoding function.
- High pass ,low pass and band pass filter
- MASK function

10M Memory depth

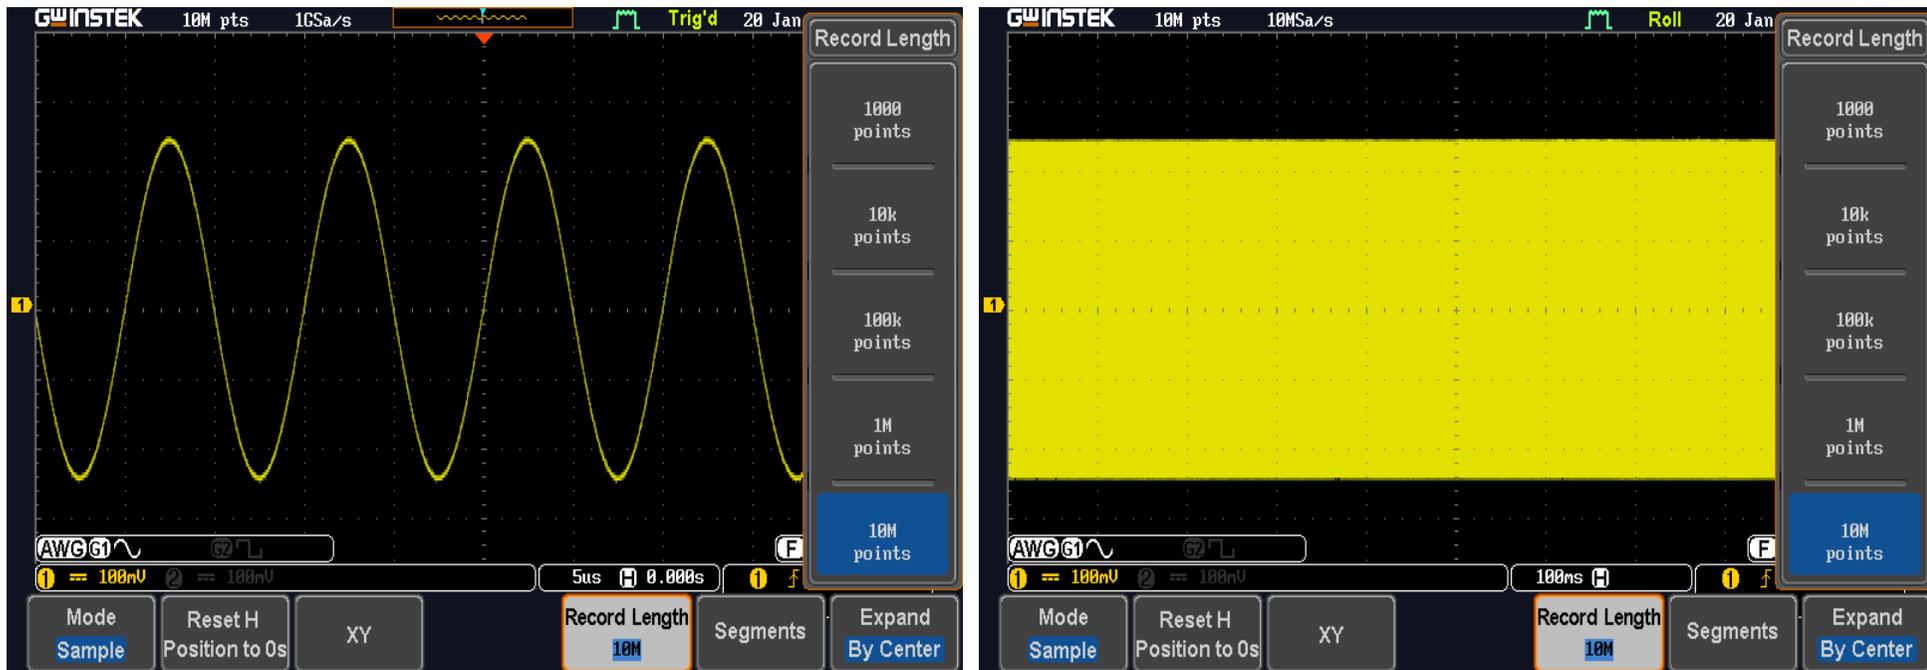

- User is allow to select 1K/10K/100K/1M/10M memory depth in normal trigger/ auto trigger or in the Roll mode.

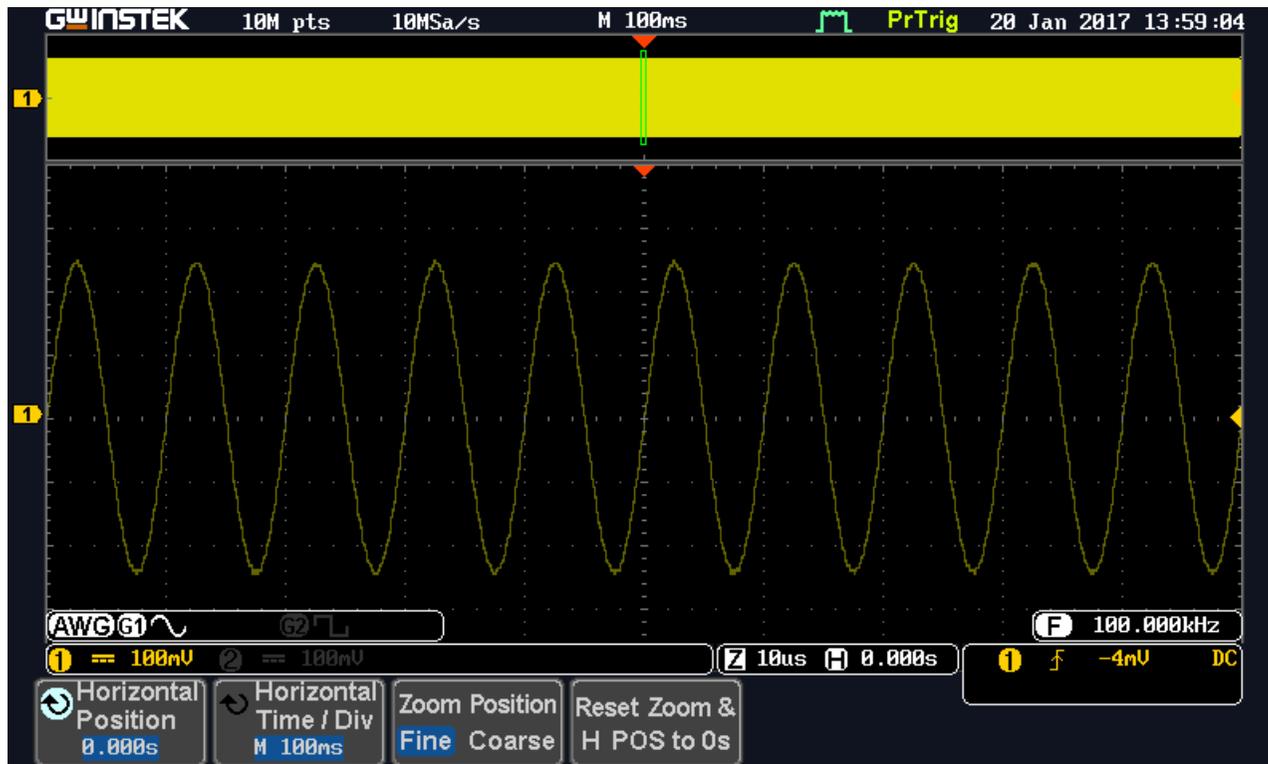


- After Zoom in to observe roll mode's waveform ,the waveform will not distortion .
- This is the way to compare long or short memory depth .

Key features introduction

- 10M memory depth
- Faster waveform update rate of 120,000wfm/s
- 1M FFT
- Waveform search
- Segmented memory
- Provide I2C/SPI/UART/CAN/LIN serial bus trigger and decoding function.
- High pass ,low pass and band pass filter
- MASK function

Waveform Update Rate

	GW Instek MDO-2000E	Rigol DS2000	Keysight X2000
Update Rate	120,000	50,000	50,000

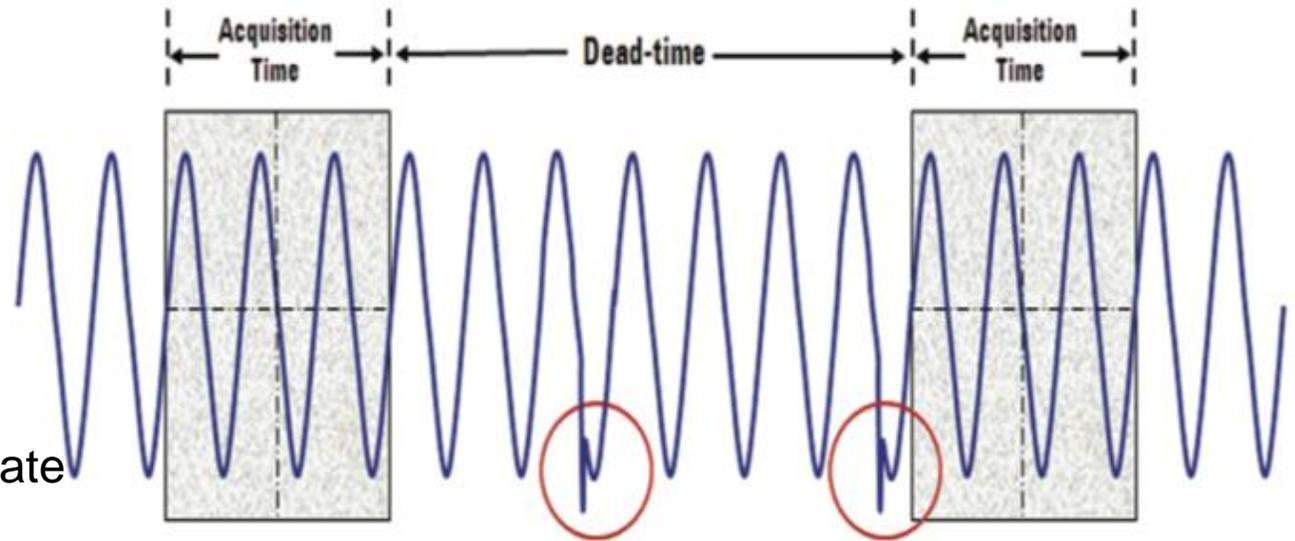

Faster waveform update rate will reduce dead-time to capture more complete waveform.




With higher waveform update rate ,MDO-2000E allow user to easily and completely observe inrush signals and rare transient waveform.

Key features introduction

- 10M memory depth
- Faster waveform update rate of 120,000wfm/s
- **1M FFT**
- Waveform search
- Segmented memory
- Provide I2C/SPI/UART/CAN/LIN serial bus trigger and decoding function.
- High pass ,low pass and band pass filter
- MASK function

Real Time FFT

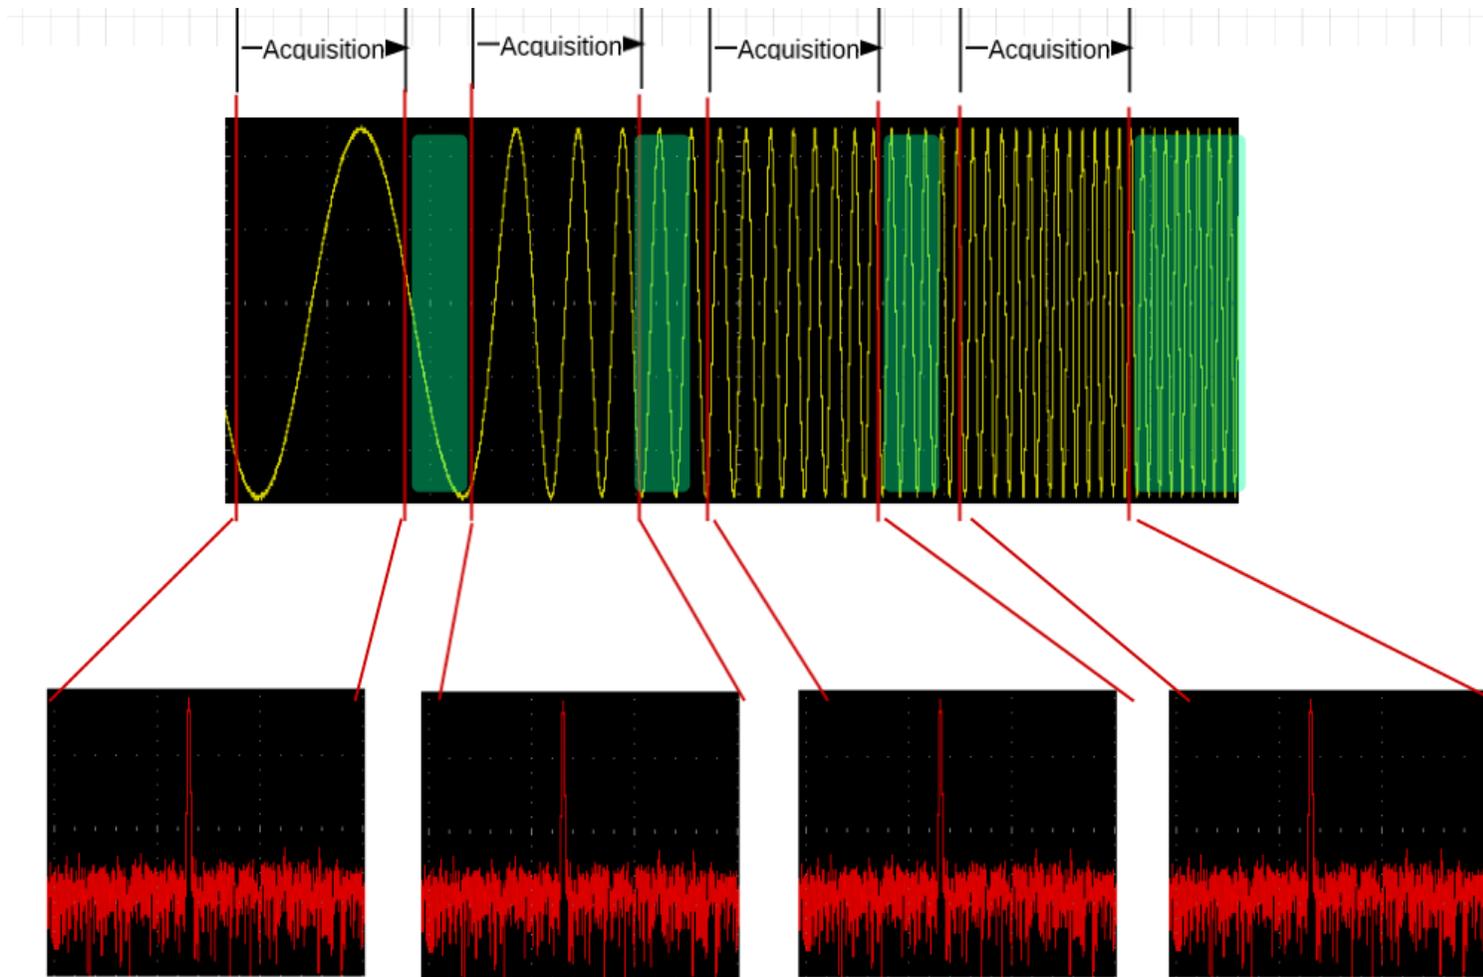

1M High Resolution FFT



- User can precisely observe the test results of frequency domain.
- Also allow to Zoom in FFT and search FFT peak.

Key features introduction


- 10M memory depth
- Faster waveform update rate of 120,000wfm/s
- 1M FFT
- **Waveform search**
- Segmented memory
- Provide I2C/SPI/UART/CAN/LIN serial bus trigger and decoding function.
- 25MHz dual channel arbitrary waveform generator
- High pass ,low pass and band pass filter
- MASK function

Waveform search



- 10M memory depth and build in waveform search function
- After turn on search function ,The left corner of monitor will display Overall to show how many events already triggered
- Available to setup Edge ,pulse width ,Runt and Rise/Fall trigger condition to search interested event
- Available to save all marks then search next trigger event.

Waveform Search

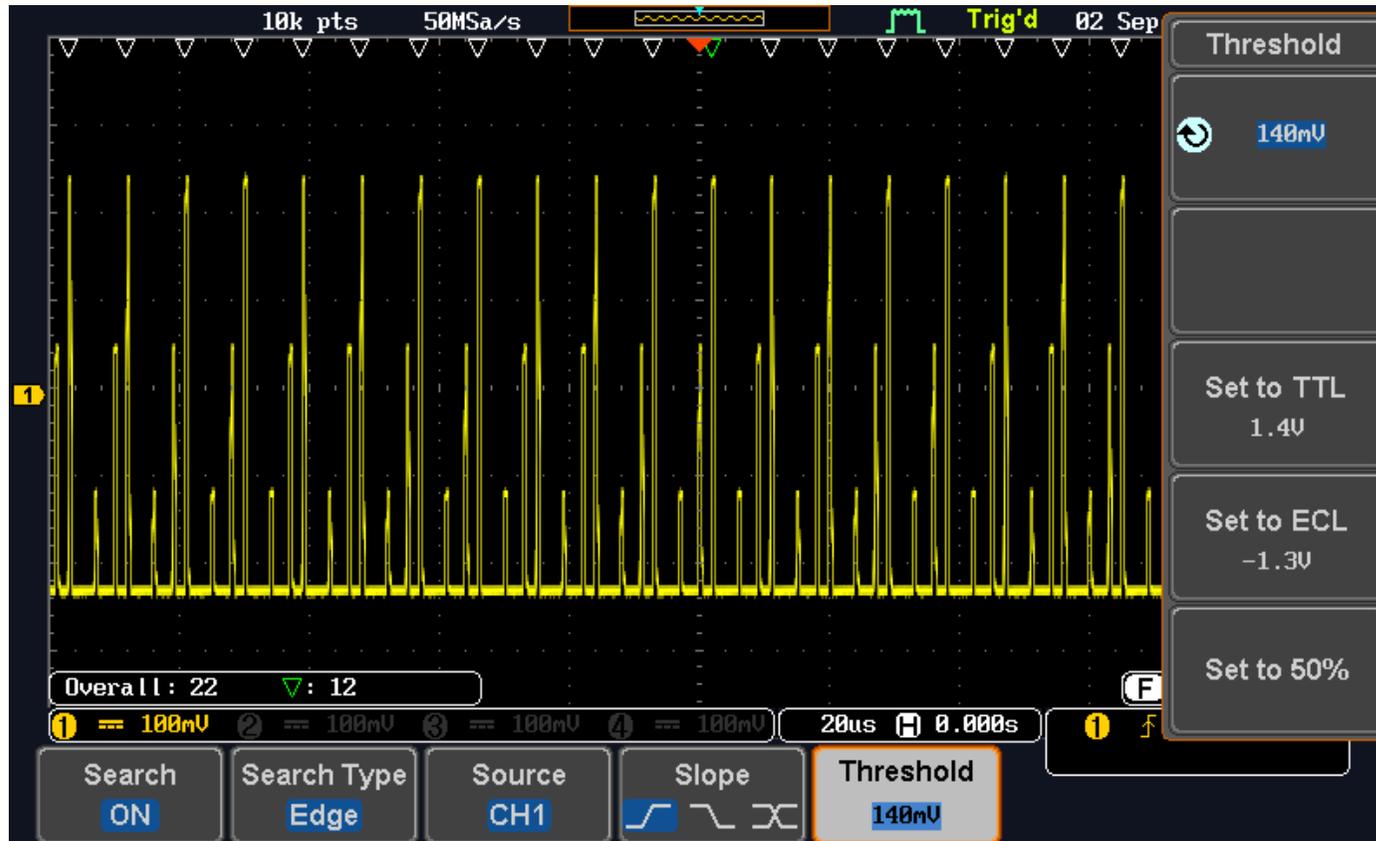


•From Waveform search function ,the user available to easy find out each triggered waveform.

Key features introduction


- 10M memory depth
- Faster waveform update rate of 120,000wfm/s
- 1M FFT
- Waveform search
- **Segmented memory**
- Provide I2C/SPI/UART/CAN/LIN serial bus and parallel bus trigger and decoding function.
- High pass ,low pass and band pass filter
- MASK function

Traditional capture method

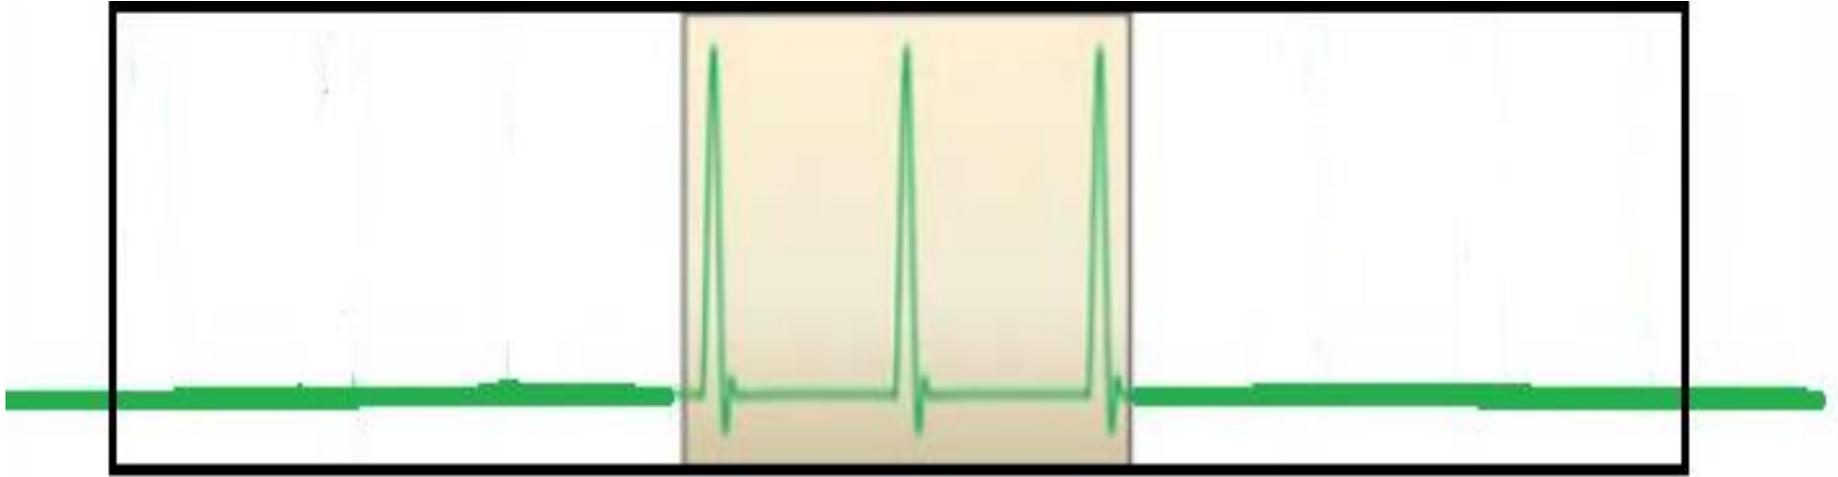


- Can not ignore the blind area, the length of the memory is limited, the user only can capture a limited trigger signal.
- Due to the short memory ,the user only available to capture limited waveform or interested events.

Segmented Memory Acquisition

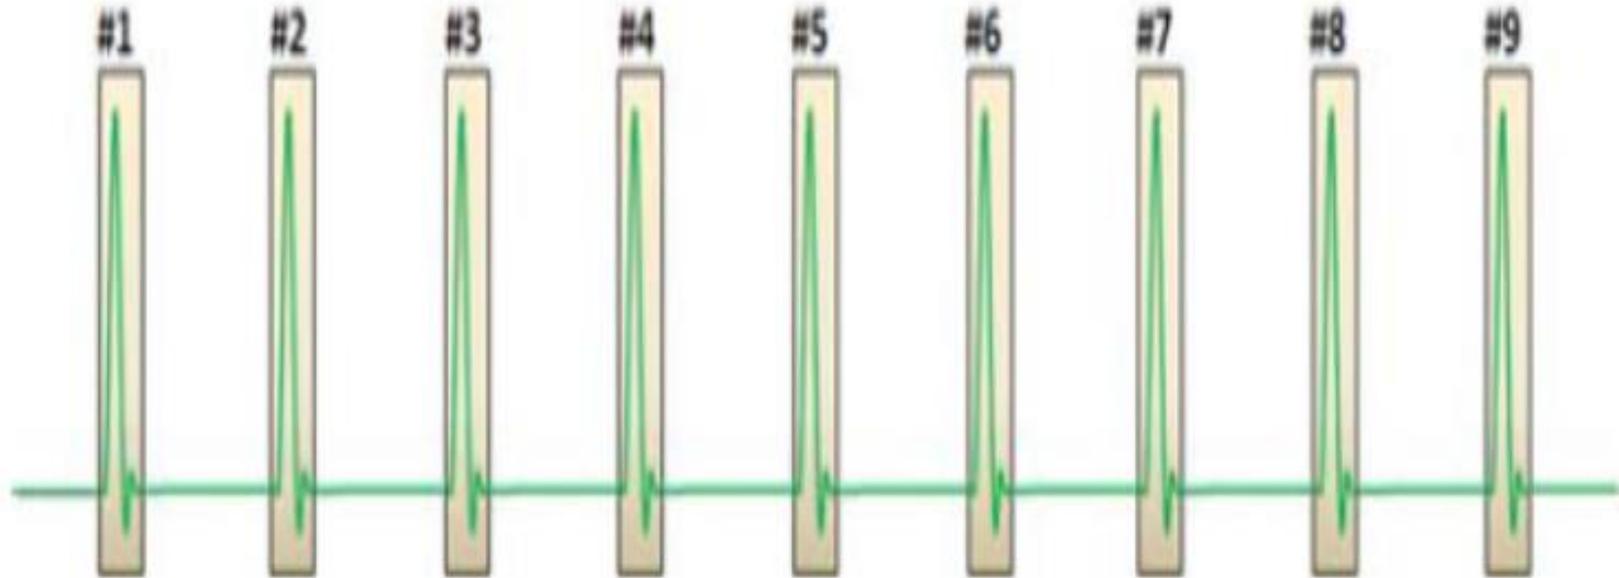


- Available to ignore the blind area that only capture and display trigger events.
- Selectively captures more waveform using the same memory depth.

Segmented memory

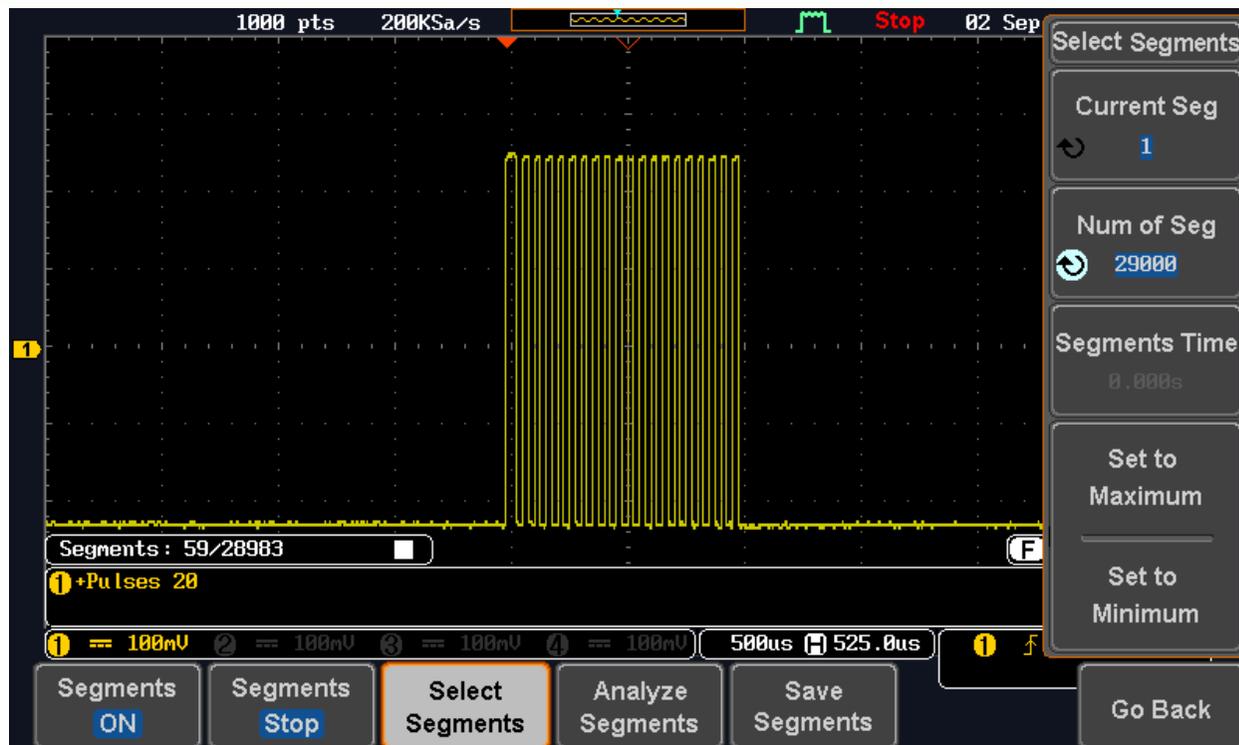

- Optimized acquisition memory
- Capture up to 29,000 successive waveform segments
- Segments include all analog and digital channels of acquisition
- Segments include serial bus decoding

To analyze segmented memory

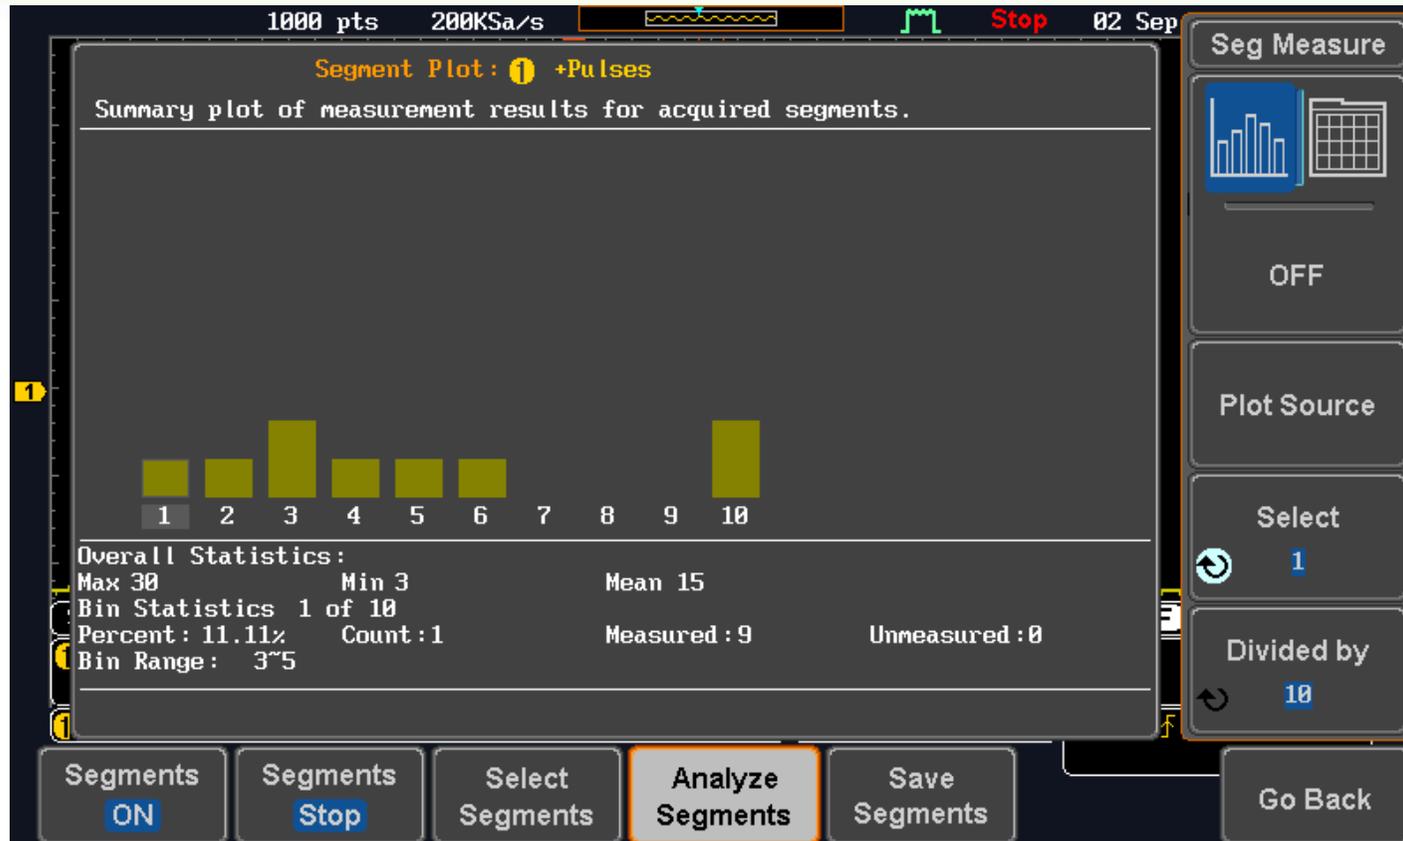

- Available to analyze the value of Max ,Min ,Mean data of the segmented memory.

Key features introduction


- 10M memory depth
- Faster waveform update rate of 120,000wfm/s
- 1M FFT
- Waveform search
- Segmented memory
- Provide I2C/SPI/UART/CAN/LIN serial bus trigger and decoding function.
- 25MHz dual channel arbitrary waveform generator
- High pass ,low pass and band pass filter
- MASK function

Bus trigger

The bus types include the following options.

Bus type	Option
UART	Tx Start Bit, Rx Start Bit, Tx End of Packet, Rx End of Packet, Tx Data, Rx Data, Tx Parity Error, Rx Parity Error
I ² C	Start, Repeat Start, Stop, Missing Ack, Address, Data, Address/Data
SPI	SS Active, MOSI, MISO, MOSI&MISO
CAN	Start of Frame, Type of Frame, Identifier, Data, Id & Data, End of Frame, Missing Ack, Bit Stuffing Err
LIN	Sync, Identifier, Data, Id and Data, Wakeup Frame, Sleep Frame, Error

Bus decode

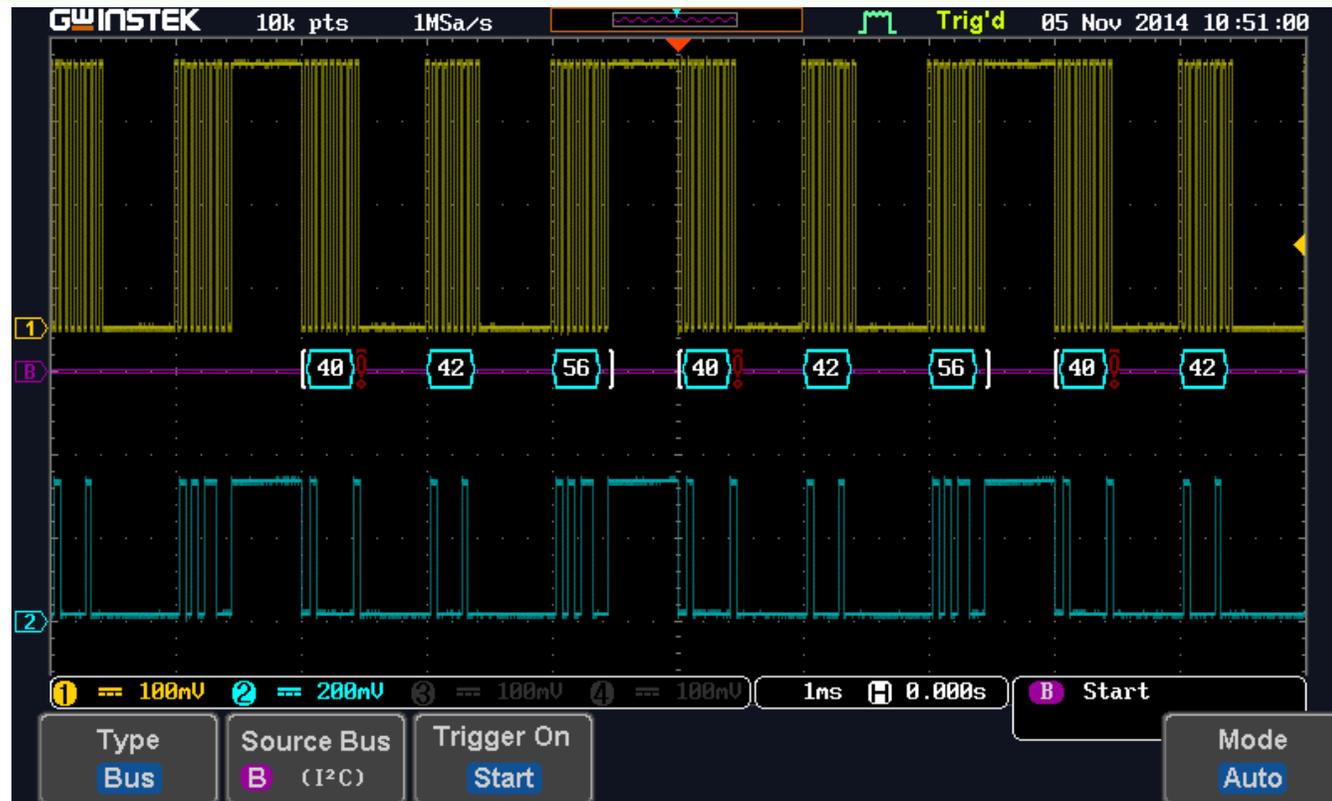


- The IoT devices connecting sensors and the peripheral components are using serial bus such as UART, I2C, and SPI.
- MDO-2000E series features standard serial bus decode and trigger function (including CAN, LIN bus decode), making the series the ideal choice for IoT experiment courses for the educational institutions.


Key features introduction

- 10M memory depth
- Faster waveform update rate of 120,000wfm/s
- 1M FFT
- Waveform search
- Segmented memory
- Provide I2C/SPI/UART/CAN/LIN serial bus and parallel bus trigger and decoding function.
- High pass ,low pass and band pass filter
- MASK function

Noisy Signal without filter

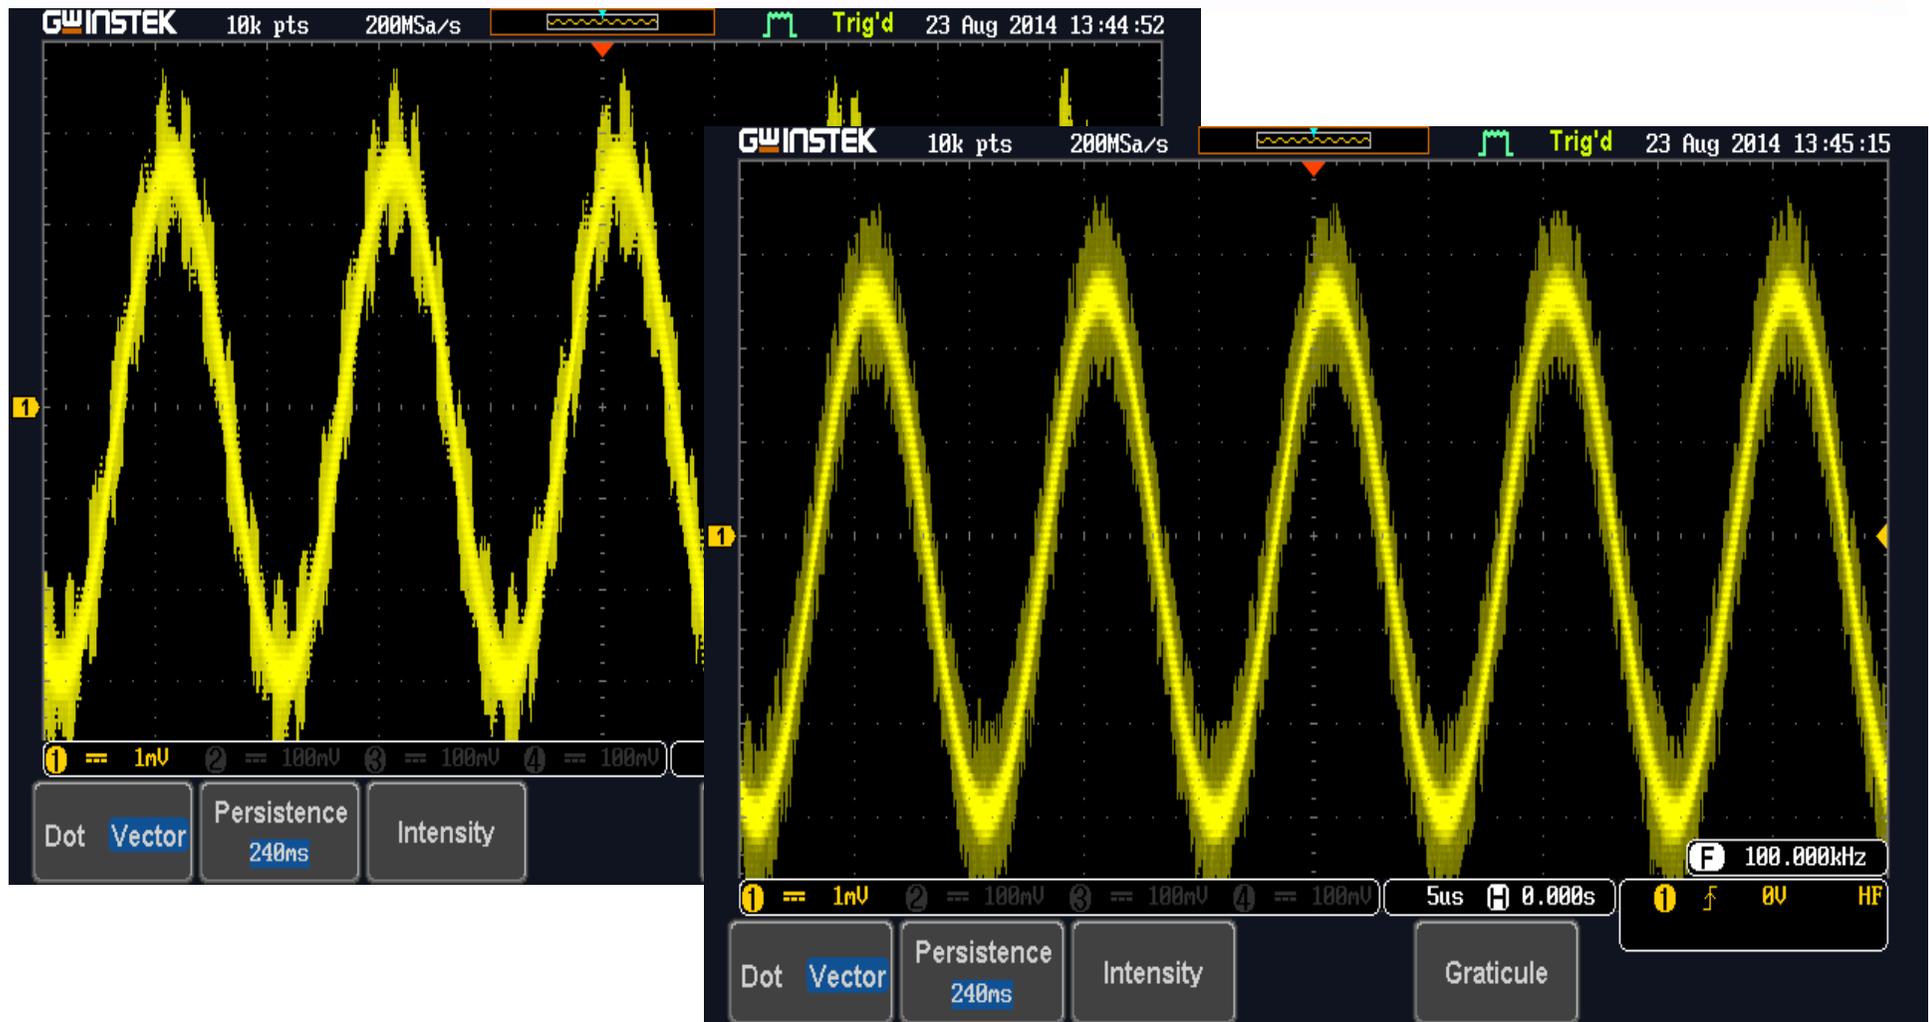

Digital Filter

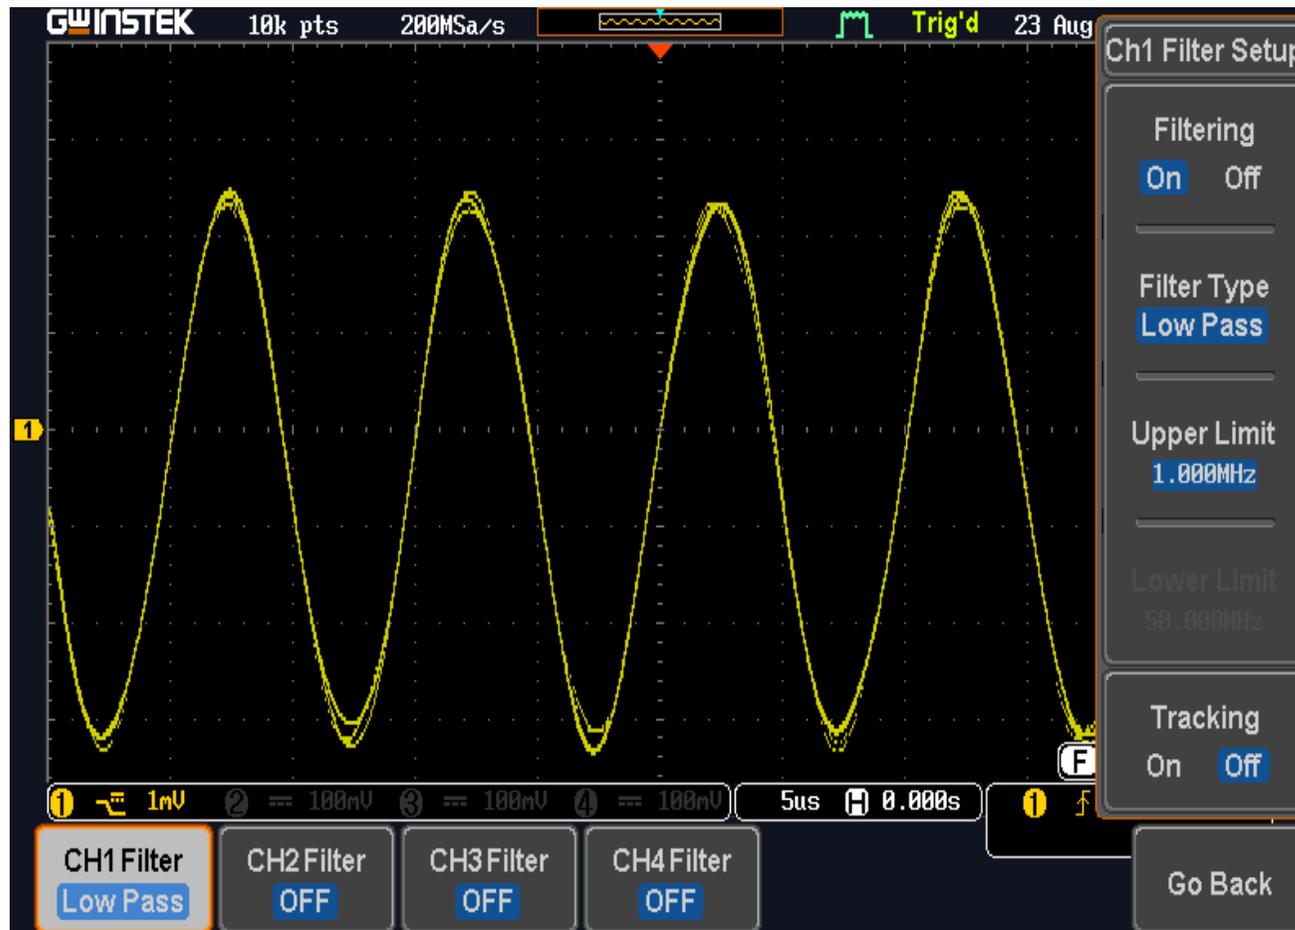


- High/Low/Band Pass can be selected
- Each channel can be set independently
- Allow to set upper limit/lower limit frequency depend on user's request .

Key features introduction


- 10M memory depth
- Faster waveform update rate of 120,000wfm/s
- 1M FFT
- Waveform search
- Segmented memory
- Provide I2C/SPI/UART/CAN/LIN serial bus and parallel bus trigger and decoding function.
- High pass ,low pass and band pass filter
- MASK function

MDO-2000E provide Mask function

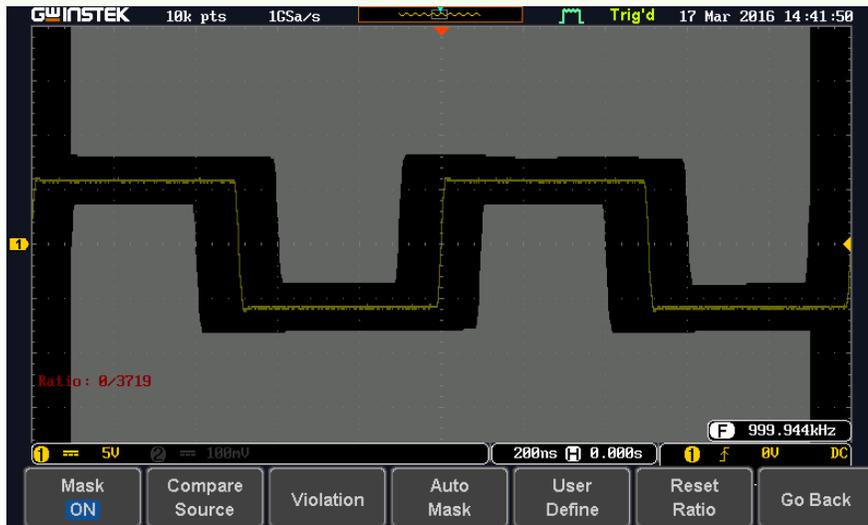

- Allow user to apply Auto Mask and user-defined Mask to determine whether the quality of the product meets the regulation.

- Via user-defined mask, users can set up to 8 areas and each area is up to 10 points to meet test requirements

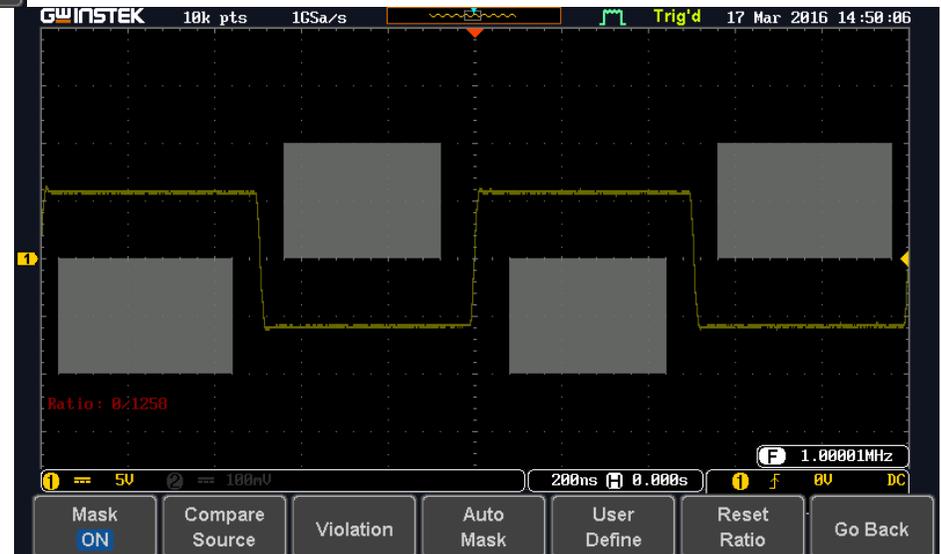

DSO Comparison

	GW Instek MSO-2000EG(X)	Tektronix DPO2000B Series	Keysight DSOX2000A	Rigol MSO/DS2000A	Siglent SDS2000X
Bandwidth	70/100/200 MHz	70/100/ 200MHz	70/ 100/ 200MHz	70/100/200/300 MHz	70/100/200/300 MHz
Channels	2 / 4	2/ 4	2/ 4	2	2 / 4
Record Length	10M/ch	1M	100k ,option to 1M	14M shared(56M option)	Record length up to 140 Mpts/CH
waveform capture rate(WFM/sec)	120,000	5,000	50,000	50,000	500,000
Real Time Sample rate	1 GSa/s	1GS/s	2GSa/s	2GSa/s(analog channel) 1GSa/s (Digital channel)	2GSa/s
Display	8" WVGA 800*480	7" WQVGA 480*234	8.5" WVGA 800*480	8inch WVGA (800x480)	8inch TFT LCD
Horizontal range	1ns~100s/div	DPO2012/ 2014: 4ns~100s/div DPO2024: 2ns~100s/div	70MHz: 5ns~50s /div 100MHz: 5ns~50s/div 200MHz: 2ns~50s/div	MSO/DS2302A/2302A-S: 1.000 ns/div to 1.000 ks/div MSO/DS2202A/2202A-S: 2.000 ns/div to 1.000 ks/div MSO/DS2102A/2102A-S/ 2072A/2072A-S: 5.000 ns/div to 1.000 ks/div	1ns/div ~ 50s/div
Vertical range	1mV~10V/div	2mV~5V/div	2mV~5V/div	500 μ V/div to 10 V/div	1mV/div - 10V/div
Bus decode	I2C, SPI, UART ,CAN,LIN,	opt. I2C, SPI (DPO2SMBD), opt. CAN, LIN (DPO2AUTO) opt. UART (DPO2COMP)	Opt.CAN ,LIN(DSOX2AUTO)	Parallel (standard), RS232 (optional), I2C (optional), SPI (optional), CAN (optional)	IIC, SPI, UART, RS232, CAN and LIN (decode optional)
Waveform Search	Standard	Standard	Nil	NA	NA
Segmented Memory	Standard	Nil	Option	NA	Standard
Logic Analyzer	16 CH	16ch	Yes 8CH (opt. DSOX2MSO)	16CH	16 Digital Channels Software and 16 Channel Logic Probe is option
FG Output	2CH AWG 25MHz	Nil	Nil	MSO2000A-S built in 2ch 25MHz function generator	1CH AWG 25MHz
Interface	LAN ,USB ,Go/NoGO BNC	USB Host/Device port ,auxiliary input Optional VGA output and LAN	USB Host*2 ,Device port *1 Optional GPIB ,LAN and WVGA output	USB Host (support USB-GPIB), USB Device, LAN, Aux Output (TrigOut/PassFail)	USB Host, USB Device (USBTMC), LAN (VXI-11), Pass/Fail, Trigger Out, GPIB (optional)
PS	Advanced Trigger is standard	Yes (opt.)	8.5"monitor ,but the waveform display is not full screen	Advanced Trigger (Option)	NA

Waveform Generator Comparison

Specification	GW Instek MDO-2000EG(X)	Keysight DSOX2000A with WaveGen option	Rigol DS-2000A-S	Siglent SDS-2000X AWG
Channel	2	1	2	1
Sample Rate	200 MSa/s	NA	200 MSa/s	125 MSa/s
Vertical Resolution	14 bits	NA	14 bits	14 bits
Max. Frequency	25 MHz	20MHz	25 MHz	25 MHz
Standard Waveform	Sine, Square, Pulse, Ramp, DC, Noise	Sine, square, pulse, triangle, ramp, noise, DC	Sine, Square, Pulse, Ramp, Noise, DC	Sine, Square, Ramp, Pulse, DC, Noise, Cardiac, Gaus Pulse, Exp Rise, Exp Fall, Arb
Built-in Waveform	Sinc, Gaussian, Lorentz, Exponential Rise, Exponential Fall, Haversine, Cardiac	NA	Sinc, Exponential Rise, Exponential Fall, ECG, Gauss, Lorentz, Haversine	
Output range	20 mVpp to 5 Vpp, HighZ	20 mVpp to 5 Vpp, HighZ	?	4mVpp ~ 6Vpp (into HiZ)
	10 mVpp to 2.5 Vpp, 50 Ω	10 mVpp to 2.5 Vpp, 50 Ω	?	2mVpp ~ 3Vpp (into 50Ω)
Amplitude output Resolution	1mV	100 μV or 3 digits, whichever is larger	?	?
Output Accuracy	2% (1 kHz)	2% (1 kHz)	?	?
Offset range	±2.5 V, HighZ	±2.5 V, HighZ	±2.5 V, HighZ	?
	±1.25 V, 50 Ω	±1.25 V, 50 Ω	±1.25 V, 50 Ω	?
Offset Resolution	1mV	100uV or 3 digits, whichever is larger	?	?
		Sine		
Frequency range	100 mHz to 25 MHz	0.1 Hz to 20 MHz	100 mHz to 1 MHz	1μHz ~ 25MHz
Flatness	±0.5 dB (relative to 1 kHz)	±0.5 dB (relative to 1 kHz)	±0.5 dB (relative to 1 kHz)	Offset Accuracy (100 kHz): ±(0.3dB* offset setting value +1mVpp)
Harmonic Distortion	-40 dBc	-40 dBc	-40 dBc	?
Stray (Non-harmonic)	-40 dBc	-40 dBc	-40 dBc	?
Total Harmonic Distortion	1%	1%	1%	?
S/N Ratio	40 dB	(50 Ω load, 500 MHz BW): 40 dB (Vpp ≥ 0.1 V); 30 dB (Vpp < 0.1 V)	40 dB	?
		Square/Pulse		
Frequency range	Square/Pulse: 100 mHz to 15 MHz	0.1 Hz to 10 MHz	Square: 100 mHz to 15 MHz; Pulse: 100 mHz to 1 MHz	1μHz ~ 10MHz
Rise/Fall Time	< 15ns	18ns	<15 ns	< 24 ns (10% ~ 90%)
Overshoot	< 3 %	<2%	<5%	< 3% (typical, 1KHz, 1Vpp)
Duty Cycle	Square: 50%	20% ~ 80%	Square: 50%	20% ~ 80%
	Pulse: 0.4% to 99.6%		Pulse: 10% to 90% (user adjustable)	
Min. Pulse Width	30ns	20ns	20 ns	> 50ns
Jitter	500 ps	500 ps	500 ps	< 500ps + 10ppm
		Ramp		
Frequency range	100 mHz to 1MHz	100 mHz to 100 kHz	100 mHz to 100 kHz	1μHz ~ 300kHz
Linearity	1%	1%	1%	< 0.1% of Pk-Pk (Typical, 1 kHz, 1 Vpp, 100% Symmetry)
Symmetry	0 to 100%	0 to 100%	0 to 100%	0% ~ 100%

Thank You.