

Anritsu envision : ensure

Radio Communication Test Station

MT8000A



All-in-One 5G RF Measurements and Protocol Tests

5G

5G, Official Start

Anritsu is releasing its new platform for developing 5G communications terminals, chipsets and devices.

With support for both RF measurements and protocol tests, this all-in-one platform can be configured easily for various tests, including RF, protocol, and use-case tests matching the module construction.

Anritsu — the leader in 4G testing — is also now taking the lead in 5G.



Flexibility

Measurement Module Configurations Matching Test Application

The all-in-one MT8000A supports RF measurements, protocol and function tests with a single unit while its flexible expandability not only meets future wider application needs but also helps cut-back new instrument investment and training costs for more efficient cost-performance.

Sub-6GHz — mmWave


Comprehensive Test Coverage from mmWave RF Measurements to Beamforming Tests

As well as supporting the sub-6 GHz used by 5G, combining the MT8000A with an RF Chamber also supports mmWave RF measurements and beamforming tests.


MT8000A



Software

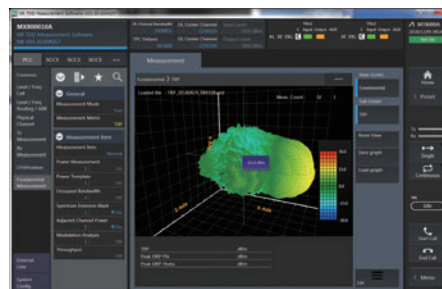

RF Measurement Software

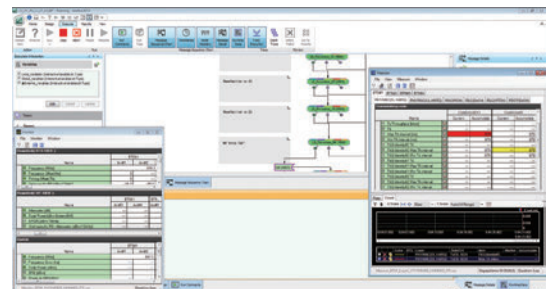

RTD for 5G NR

The Wireless Communication Test Station for 5G Device Development

Radio Communication Test Station MT8000A Features

All-in-One Support for RF Measurements and Protocol Tests in Sub-6GHz and Millimeter Wave Bands

With a 5G base station emulation function, a single MT8000A test platform supports both the sub-6GHz and millimeter wave bands used by 5G. Combining it with the RF Chamber enables both millimeter wave band RF measurements and beamforming tests using call connections specified by 3GPP.


Example of supported band

Band	n71 (600 MHz)	n41 (2.5 GHz)	n78-79 (3.5 G/4.5 GHz)	n257 (28 GHz)	n260 (39 GHz)
	✓	✓	✓	✓	✓

*: Please enquire about other supported bands.


Flexible Platform using Modular Architecture

The leading-edge design with flexibility and scalability using a modular architecture. As well as supporting high-speed broadband communications, this design provides flexible futureproof support for new 5G test requirements, including URLLC (Ultra-Reliable and Low Latency Communications) and mMTC (massive Machine Type Communications).

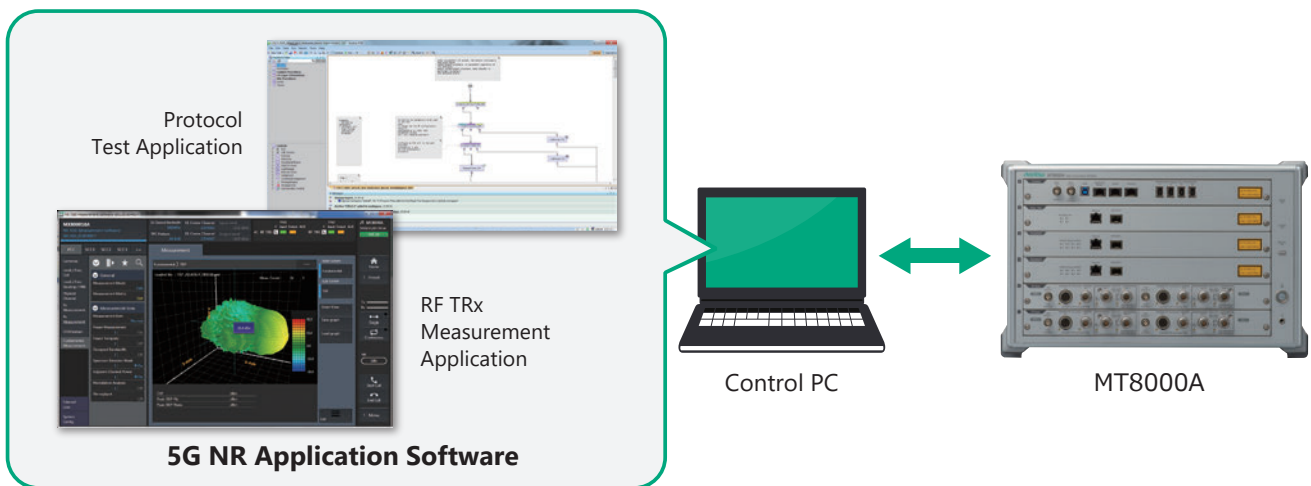

Supports Existing LTE Test Environment

A comprehensive test environment is provided by making use of Anritsu's LTE test platform offering leading-edge functions based on the company's long experience in this market. Easy configuration of a linked environment for simulating 5G NSA (non-standalone) with LTE makes best use of measurement assets, such as the customer's test environment, test scenarios.

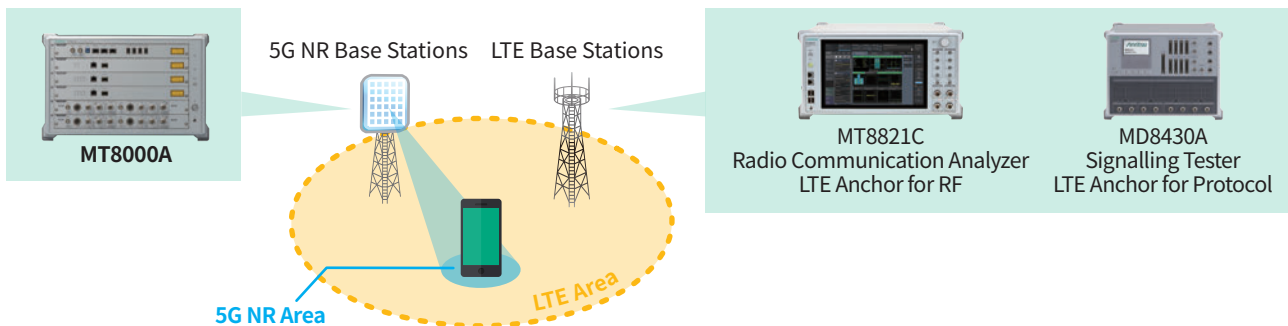

Radio Communication Test Station MT8000A Features


RF TRX Measurement GUI : MX800010A

3GPP RF Tests

Development and testing of mobile terminals and chipsets as well as network operator acceptance inspection tests, etc., are essential for evaluating compliance of the mobile terminal TRx performance with the 3GPP standards. With the increasing complexity of mobile terminal circuitry due to the use of more frequency bands, such as mmWave, the MX800010A software is an ideal solution for testing various aspects in support of 5G NR Mobile terminal RF TRx tests.

Flexible Parameter Settings

The easy to change MX800010A parameter settings also support RF parametric tests and simplified protocol tests.

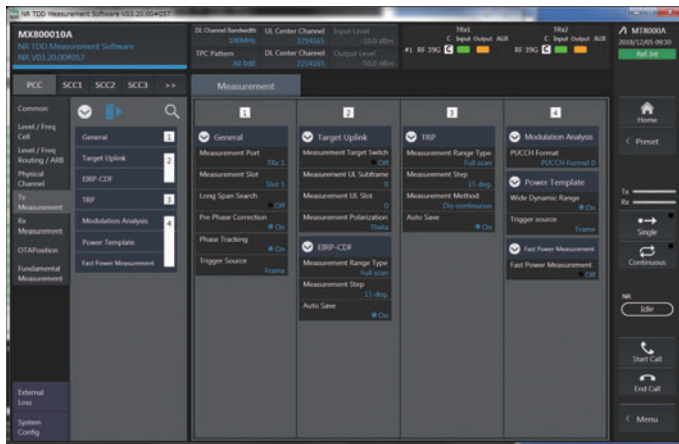


Typical Parameters (5G NR)

Supports Tests in NSA Mode

The 5G NR non-standalone (NSA) mode is supported and the Radio Communication Analyzer MT8821C can be used as an LTE Anchor in the NSA mode.

Enhanced GUI for Efficient Operability

The MX800010A has the same easy to use and easy to understand GUI as the MT8821C. In addition to one-touch switching of listed and individual graph displays as well as summary and detailed displays of measurement results, the MX800010A supports convenient parameter setting functions such as, parameter searching and bookmarking for frequently used parameters.

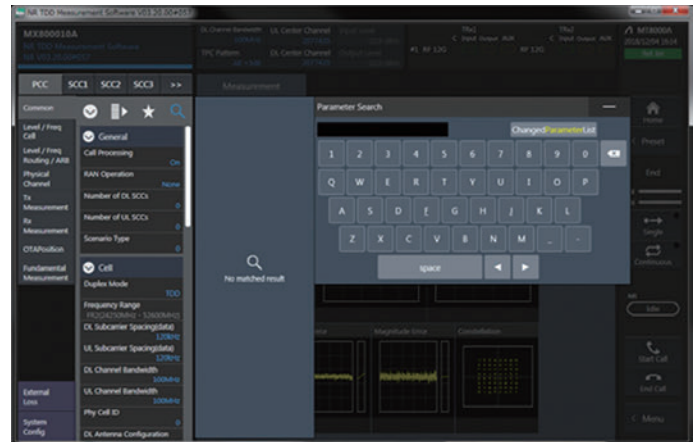

Parameter Search Function



Graph Display

Radio Communication Test Station MT8000A Features

RF TRX Measurement GUI : MX800010A

OTA (Over The Air) Tests


OTA evaluation is required because the TRx performance of mobile terminals is influenced by factors such as the terminal form and antenna characteristics, etc.

There are two main types of 5G NR OTA test as follows:

- mmWave RF TRx Test
- Evaluating Mobile Terminal General TRx Performance Including Antenna



<mmWave RF TRx Test>

Since 5G NR uses an antenna array for sending and receiving signals in the mmWave band, evaluation of the RF TRx performance is performed using an OTA connection without an RF cable connection like that for LTE. Anritsu provides a turnkey mmWave RF TRx measurement solution including the RF chamber.

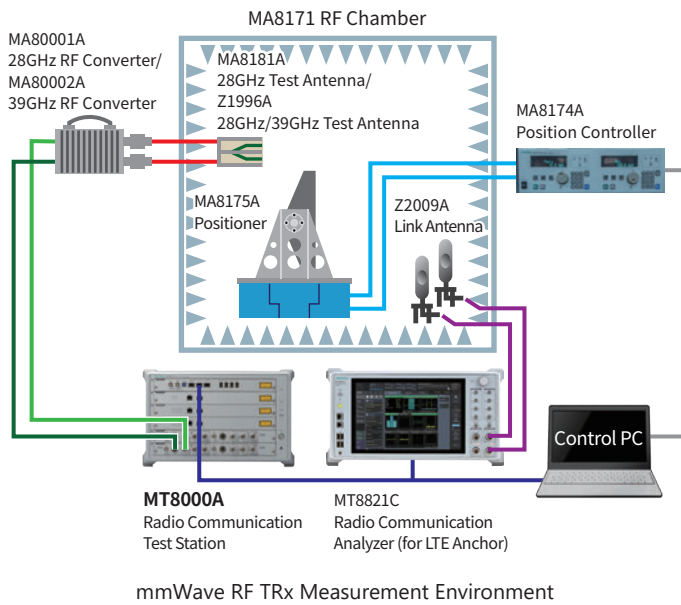


<Evaluating Mobile Terminal General TRx Performance Including Antenna>

There are two antenna test methods: Total Radiated Power (TRP), and Total Radiated Sensitivity (TRS); various test systems using the MT8000A are available from OTA vendors.

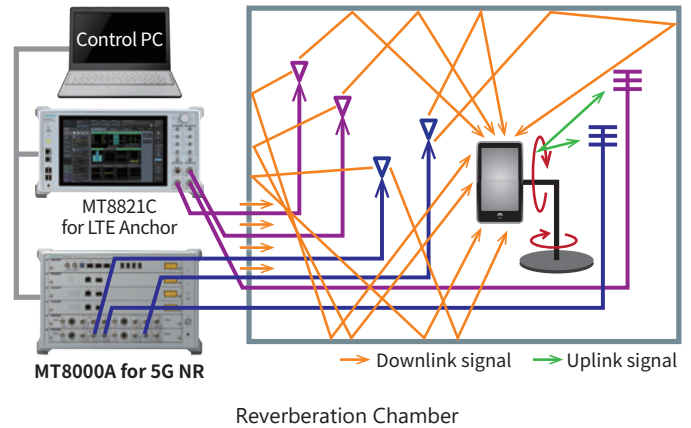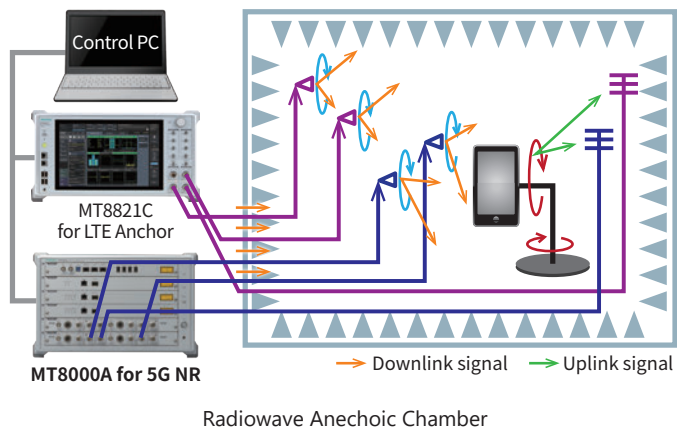

SAR (Specific Absorption Rate) Test

The SAR test evaluates the amount of energy in the electromagnetic spectrum radiated from the mobile terminal absorbed by a jig known as a 'phantom', mimicking the human body. The purpose of this test is to help protect handheld users from adverse effects of electromagnetic waves on health. The specified amount of permissible absorbed energy is regulated by national and regional standards. The MT8000A fully supports 5G NR SAR tests.

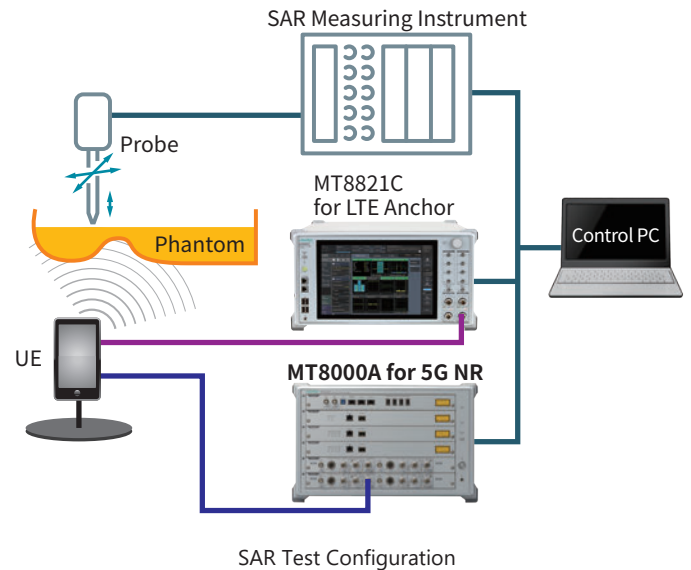


Radio Communication Test Station MT8000A Features

NR Protocol Test Solutions

Encoding/Decoding Test

The 5G NR terminal encoding/decoding test is performed by connecting the equipment as follows using an RF cable.

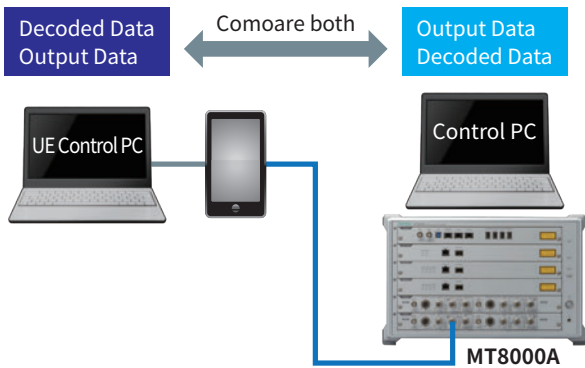

Encoding/Decoding Test Configuration (RF, Serial Control Test)


The Rapid Test Designer Platform (RTD) MX800050A and the NR Protocol Firmware MX800051A have built-in support for the digital baseband input/output function. Using the function supports high-reproducibility encoding/decoding tests without dependence on the performance of the RF section for stable baseband evaluation of 5G NR chipsets. In addition, 5G NR encoding/decoding tests are performed certainly because the baseband chip is evaluated at a slow clock below the clock frequency.

Cuts Test Case Developer Training

With a full range of test procedures for Layer 1/2 and Layer 3 tests, the RTD software eliminates the need for specialist knowledge about TTCN code and unique simulator APIs, etc. Moreover, each procedure automatically sets the Layer 1/2 (L1/L2) connection conditions based on the complex 3GPP standards. Since the MD8430A can be controlled directly, 5G NR and LTE NSA test environments can be configured easily. Furthermore, the full range of available reference test samples with confirmed connections supports development of test cases using a library.

Shortens Test Case Development Time


The RTD GUI makes it easy to create test cases using intuitive operations to connect procedures. Additionally, each procedure has a screen for setting various parameters, such as network conditions and message information, to increase test case variations using simple operation. Lastly, an analysis function checks for program mistakes prior to testing, and any code edits or changes are reflected immediately in the executed test.

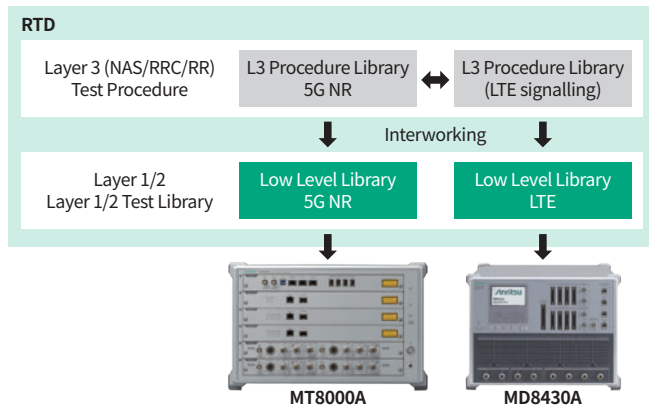


RTD Procedure Block

Efficient Execution, Evaluation and Analysis

Test sequences can be confirmed in real-time during test execution and completed test results can be confirmed at a glance because Pass/Fail evaluations are defined within the test case. Moreover, detailed analysis is supported by integration of an HTML-based protocol analyzer with the RTD. Additionally, export of logs into HTML enables logs to be opened on any PC in the same manner as the protocol analyzer.

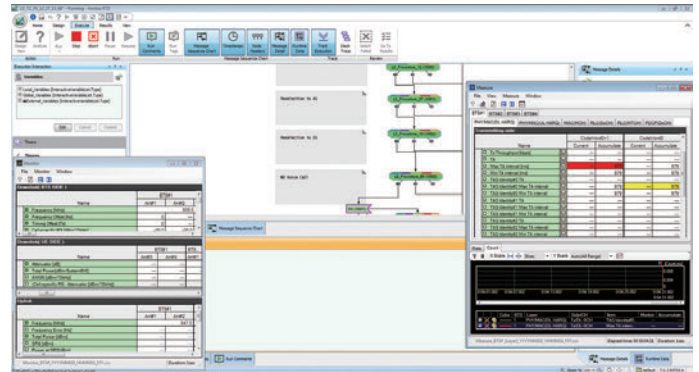

Test Execution Screen (RTD)

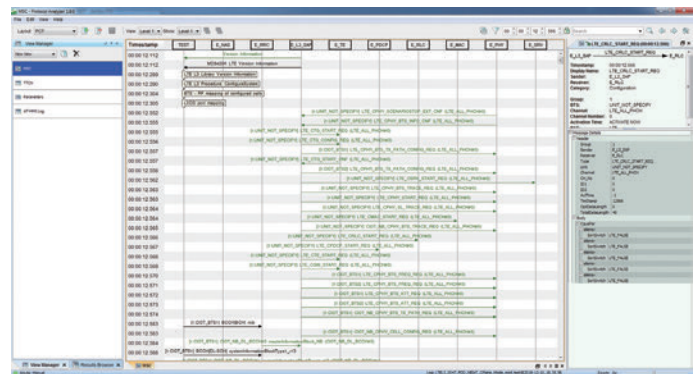

Log Analysis Screen (RTD)

Radio Communication Test Station MT8000A Features


NR Protocol Test Solutions

Throughput Tests at Various Conditions

Combining the MX800030A with the Data Test Module MT8000A-012 supports IP throughput tests. Sample scenarios bundled with the software can be used to change parameters, such as bandwidth, scheduling, HARQ, etc., easily for running 5G NR IP throughput tests under various conditions.


Handover Tests at Various Conditions

With support for up to 8 cells, handover tests between 5G NR 4CA cells are possible using only one MT8000A. Moreover, installing the Multi Box Data Connection MT8000A-009 option in the MT8000A enables up to 8CA 2x2 MIMO handover tests by connecting two MT8000A units. Lastly, combined use with the Signalling Tester MD8430A supports LTE interworking, helping maximize customers' investment in their existing hardware.

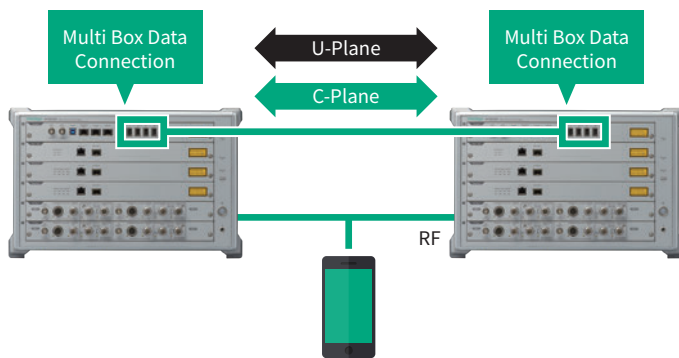

Fully Versatile L1/L2 Monitoring Functions


To support the development of 5G terminals that process large volumes of low-layer data at very high speeds, the software enhances a full line of versatile power monitoring, throughput monitoring and log analysis functions. The Measure (Counter) functions can monitor Layer 1/2 (L1/L2) throughputs in real time by counting parameter values such as ACK/NACK/DTX/CQI.

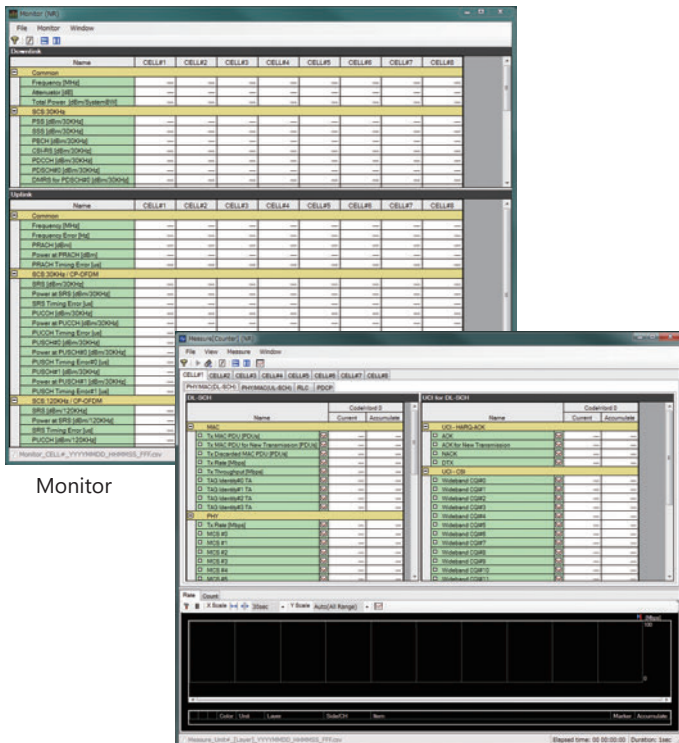

Monitor (Counter, Throughput Monitor)

Powerful Test Automation

With support for mobile terminal control interfaces, the RTD software simplifies test automation. In addition, continuous multiple test case execution and automatic test report creation as well as various functions including repeat operation for a set number of times provide powerful support for automated testing.

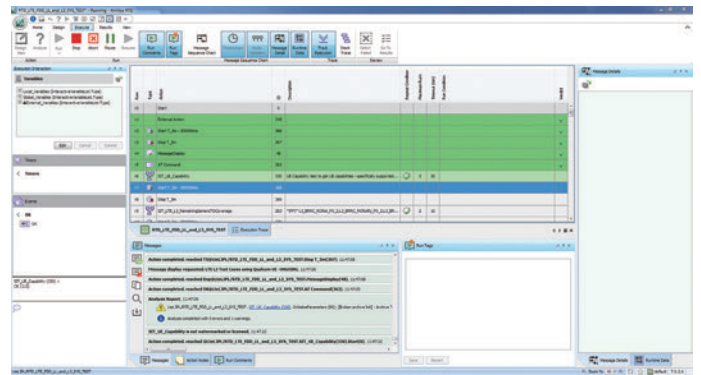

Example of Continuous Test Case Execution

Easy Test Case Maintenance

Test cases created using the RTD software are easily updated for new 3GPP standard releases, helping cut test-case editing workloads. Moreover, recompiling is unnecessary because test cases maintain compatibility even after firmware updates. Consequently, test-case maintenance costs at commercial release of new mobile terminals are greatly reduced for pre-inspection regression tests and interoperability tests (IOT) with networking equipment.

Radio Communication Test Station MT8000A Layout

System Configuration



- 1 Radio Communication Test Station MT8000A**
All-in-one test platform supporting 5G RF measurements and protocol tests.
- 2 28 GHz RF Converter MA80001A/39 GHz RF Converter MA80002A**
Convert frequency of RF signal output from MT8000A to 28 GHz and 39 GHz band.
- 3 RF Chamber MA8171A**
For 5G RF measurements/protocol tests in OTA environment.
- 4 Position Controller MA8174A**
Controls the Positioner MA8175A rotational angle inside the RF Chamber MA8171A.

Radio Communication Test Station MT8000A Layout

MT8000A Front Panel




- 1 Ground Terminal**
Functional ground terminal used as a measure against electrostatic discharge while using the MT8000A.
- 2 Power Switch**
Switches power-on and standby. When the MT8000A is in the power on status, the LED lights up (green).
- 3 Standby LED**
When the MT8000A is in the standby status of which the AC power is on, the LED lights (orange).
- 4 Recover LED/Recover Switch**
Switch to recover MT8000A in case of emergency. Recovery LED lights up (orange) when the recovery function is enabled.
- 5 Caution LED**
Lights up (orange) when MT8000A detects abnormality.
- 6 Ready LED**
Lights up (green) when MT8000A startup is completed after power-on.
- 7 Control Module MT8000A-001 (with Multi-box Data Connection MT8000A-009)**
Controls the entire MT8000A, processes upper layers, downloads firmware, and start MT8000A. Optical ports are used for connecting multiple MT8000As.
- 8 Data Test Module MT8000A-012**
Performs data transfer for IP throughput test.
- 9 Baseband Module MT8000A-011**
Performs baseband processing (L1/L2) in protocol test.
- 10 RF Base Module MT8000A-020 (with MT8000A-022, MT8000A-023)**
Converts digital signals into analog signals.
Functions as RF interface for the external RF Converter or for RF signals in 2 GHz to 12 GHz.
(in 0.4 GHz to 6 GHz when 0.4 GHz-6 GHz RF Sub Module MT8000A-021 is installed)


Radio Communication Test Station MT8000A Layout

MT8000A Modules

Control Module MT8000A-001

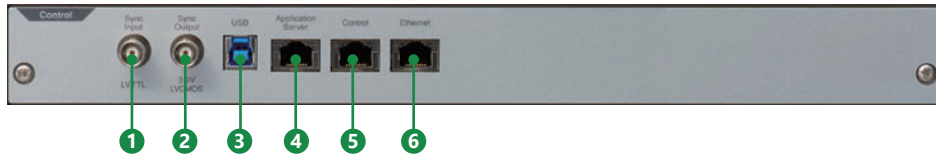

Control Module MT8000A-001 + Multi-box Data Connection MT8000A-009

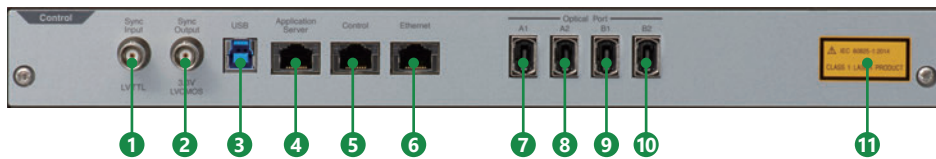

- 1 Sync Input Connector**
BNC connector for inputting synchronizing signal.
- 2 Sync Output Connector**
BNC connector for outputting synchronizing signal.
- 3 USB Connector**
USB (Type B) connector to connect the external PC.
- 4 Application Server Connector**
RJ-45 connector to connect the external PC for Application Server.
- 5 Control Connector**
RJ-45 connector for connecting the MT8000A and Control PC.
- 6 Ethernet Connector**
RJ-45 connector for connecting the external PC, etc.
- 7 Optical Port A1 Connector**
MPO connector A1 for connecting multiple MT8000As when MT8000A-009 Multi-box Data Connection is installed.
- 8 Optical Port A2 Connector**
MPO connector A2 for connecting multiple MT8000As when MT8000A-009 Multi-box Data Connection is installed.
- 9 Optical Port B1 Connector**
MPO connector B1 for connecting multiple MT8000As when MT8000A-009 Multi-box Data Connection is installed.
- 10 Optical Port B2 Connector**
MPO connector B2 for connecting multiple MT8000As when MT8000A-009 Multi-box Data Connection is installed.
- 11 Explanatory Label**
Indicates that the Optical Port A1, A2, B1, and B2 are Class 1 laser products.

Radio Communication Test Station MT8000A Layout

MT8000A Modules

Data Test Module MT8000A-012



- 1 Data Test Status LED**
Indicates the Data Test status.
- 2 Ethernet Connector for Data Test**
RJ-45 connector for Data Test.
- 3 SFP/SFP+ Connector**
Connector to insert SFP or SFP+ (application parts) into.
- 4 Explanatory Label**
Indicates that the device is a Class 1 laser product when SFP or SFP+ are installed.

Baseband Module MT8000A-011




- 1 Baseband Status LED**
Indicates the Baseband status.
- 2 Ethernet Connector for Baseband**
RJ-45 connector for Baseband.
- 3 SFP/SFP+ Connector**
Connector to insert SFP or SFP+ (application parts) into.
- 4 Explanatory Label**
Indicates that the device is a Class 1 laser product when SFP or SFP+ are installed.


Radio Communication Test Station MT8000A Layout

MT8000A Modules


RF Base MT8000A-020

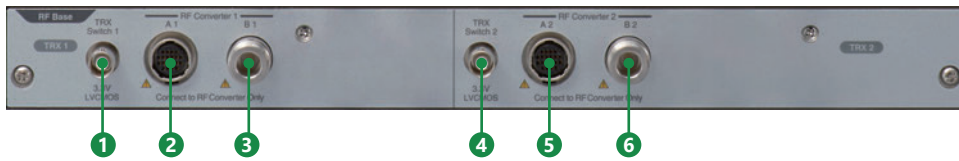

MT8000A-020 + 3 GHz-12 GHz RF Sub Module MT8000A-022

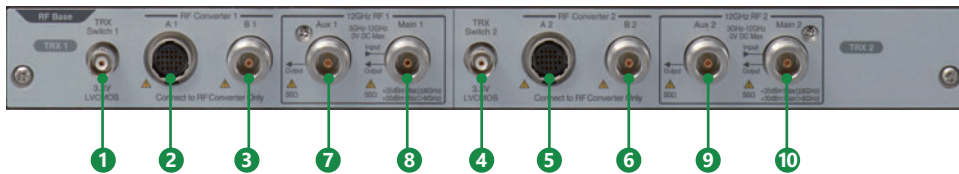

MT8000A-020 + MT8000A-022 + Extend RF 2.4 GHz-3 GHz MT8000A-023

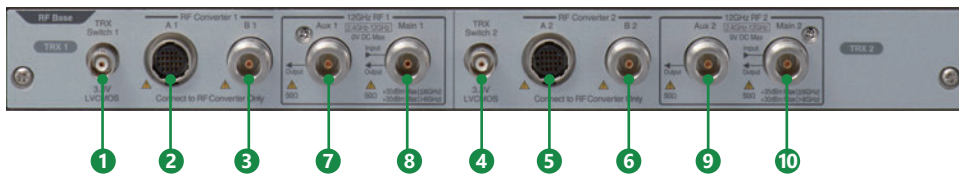


- 1 TRX Switch 1 Connector**
BNC connector that outputs signals to control the external amplifier, etc.
- 2 RF Converter 1 A1 Connector**
Multi-contact connector that controls the external RF Converter.
- 3 RF Converter 1 B1 Connector**
N connector that input/output the external RF Converter and RF signals.
- 4 TRX Switch 2 Connector**
BNC connector that outputs signals to control the external amplifier, etc.
- 5 RF Converter 2 A2 Connector**
Multi-contact connector that controls the external RF Converter.
- 6 RF Converter 2 B2 Connector**
N connector that inputs/outputs the RF signals between the external RF Converter and MT8000A.
- 7 12 GHz RF1 Aux 1 Connector**
RF auxiliary connector (output) when 3 GHz-12 GHz RF Sub Module option is installed.
- 8 12 GHz RF1 Main 1 Connector**
RF main connector (input/output) when 3 GHz-12 GHz RF Sub Module option is installed.
- 9 12 GHz RF2 Aux 2 Connector**
RF auxiliary connector (output) when 3 GHz-12 GHz RF Sub Module option is installed.
- 10 12 GHz RF2 Main 2 Connector**
RF main connector (input/output) when 3 GHz-12 GHz RF Sub Module option is installed.

Note: The frequency range indicated on the panel is "2.4 GHz-12 GHz" when MT8000A-023 Extend RF 2.4 GHz-3 GHz is installed. RF Converter 1 and RF Converter 2 cannot be used simultaneously with 12 GHz RF 1 and 12 GHz RF 2 respectively.

Radio Communication Test Station MT8000A Layout

MT8000A Modules

RF Base Module MT8000A-020 + 0.4 GHz-6 GHz RF Sub Module MT8000A-021

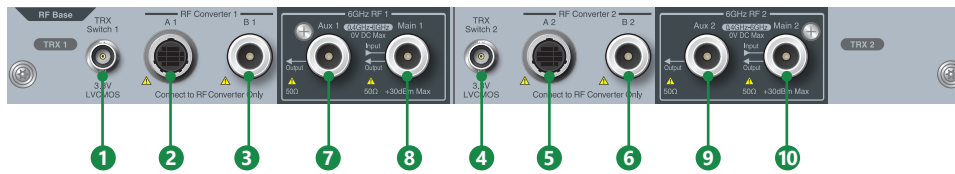


- 1 TRX Switch 1 connector**
BNC connector that outputs signals to control the external amplifier, etc.
- 2 RF Converter 1 A1 connector**
Multi-contact connector that controls the external RF Converter.
- 3 RF Converter 1 B1 connector**
N connector that input/output the external RF Converter and RF signals.
- 4 TRX Switch 2 connector**
BNC connector that outputs signals to control the external amplifier, etc.
- 5 RF Converter 2 A2 connector**
Multi-contact connector that controls the external RF Converter.
- 6 RF Converter 2 B2 connector**
N connector that inputs/outputs the RF signals between the external RF Converter and MT8000A.
- 7 6 GHz RF1 Aux 1 connector**
RF auxiliary connector (output) when 0.4 GHz-6 GHz RF Sub Module option is installed.
- 8 6 GHz RF1 Main 1 connector**
RF main connector (input/output) when 0.4 GHz-6 GHz RF Sub Module option is installed.
- 9 6 GHz RF2 Aux 2 connector**
RF auxiliary connector (output) when 0.4 GHz-6 GHz RF Sub Module option is installed.
- 10 6 GHz RF2 Main 2 connector**
RF main connector (input/output) when 0.4 GHz-6 GHz RF Sub Module option is installed.

Note: The frequency range indicated on the panel is "0.4 GHz-6 GHz" when 0.4 GHz-6 GHz RF Sub Module MT8000A-021 is installed.
RF Converter 1 and RF Converter 2 cannot be used simultaneously with 6 GHz RF 1 and 6 GHz RF 2 respectively.

Radio Communication Test Station MT8000A Layout

MT8000A Rear Panel

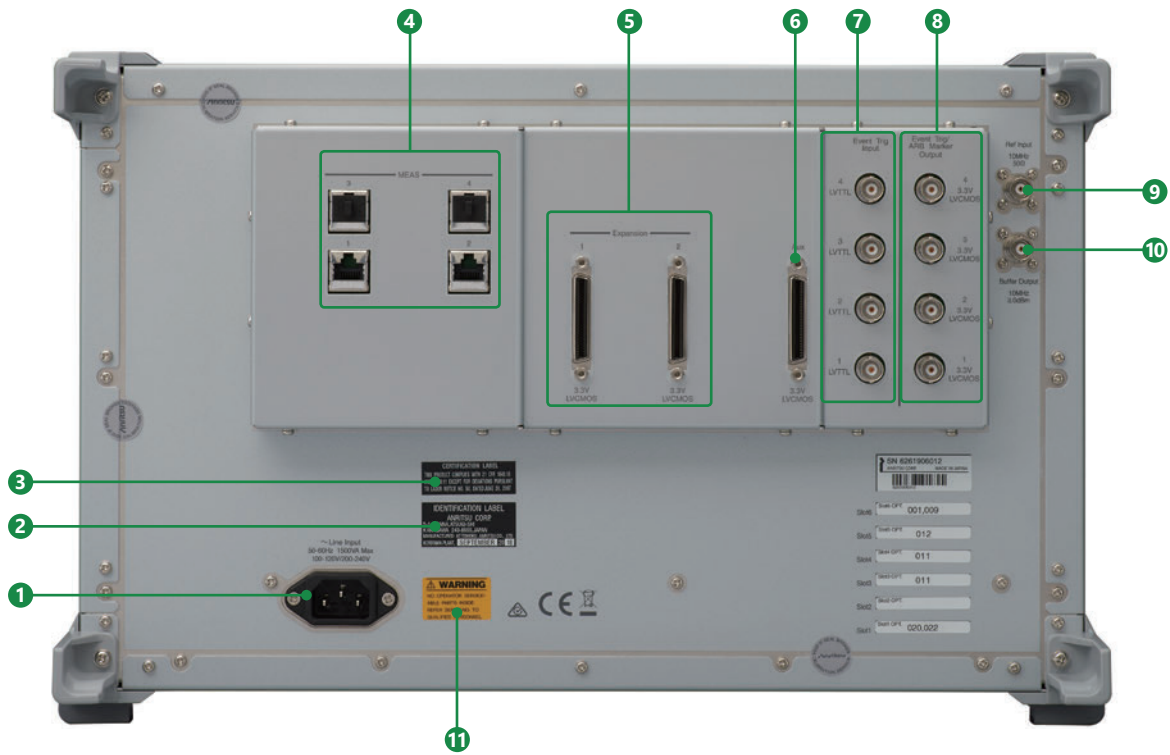

- 1 Power Inlet**
Power cable connector for 100 V(ac) to 120 V(ac) or 200 V(ac) to 240 V(ac) (50 Hz/60 Hz) (auto-switching).
Power consumption: 1500 VA or less.
- 2 Identification Label**
Identifies the manufacturer of laser products.
- 3 Certification Label**
Certifies that the MT8000A conforms to 21 CFR 1040.10 AND 1040.11 except Laser Notice No.50.
- 4 Ethernet Connector for Measure**
RJ-45 connector for measurement.
- 5 Expansion Connector**
Used for input/output of trigger signals.
- 6 Aux Connector**
Auxiliary connector to output frame timing signals.
- 7 Event Trigger Input Connector**
BNC connector to input event triggers from external devices. Can input event trigger signals of 4 systems.
- 8 Event Trigger Output Connector**
BNC connector to output event triggers to external devices. Can output event trigger signals of 4 systems. Can be used also as output of ARB marker.
- 9 Reference signal input connector**
BNC connector to input 10 MHz reference signal from external devices.
- 10 Reference Signal Output Connector**
BNC connector to output 10 MHz reference signal built in the MT8000A.
- 11 Safety Label**
WARNING label for safe operation of MT8000A. Observe the description on the label.

Radio Communication Test Station MT8000A Specifications

Radio Communication Test Station MT8000A

Reference Oscillator	Reference frequency: 10 MHz Start-up characteristics: $\pm 5 \times 10^{-8}$ (3 min. after power-on. Referenced to frequency 1 hour after power-on) Aging rate: $\pm 1 \times 10^{-9}$ /day (referenced to frequency 48-hour after power-on) $\pm 1 \times 10^{-7}$ /year (referenced to frequency 10-day after power-on) Temperature characteristics: $\pm 2 \times 10^{-8}$ Frequency adjusted at shipment: $\pm 2.2 \times 10^{-8}$ (+18° to +28°C, referenced to frequency 1 hour after power-on) 10 MHz Buffer Output Frequency: 10 MHz Connector: BNC (f) Impedance: 50Ω (nom.) Output Level: ≥ 0 dBm (AC coupling) 10 MHz Ref Input Frequency: 10 MHz Operating range: ± 1 ppm Connector: BNC (f) Impedance: 50Ω (nom.) Input level: -15 dBm \leq level \leq +20 dBm (AC coupling)	
External Interface	MEAS 1 to 4: RJ45, 1000Base-T, for slot 1 to 4 Event TRIG Input 1 to 4: BNC (f), LVTTTL Event TRIG/ARB Maker Output 1 to 4: BNC (f), 3.3 V LVCMOS Expansion 1, 2: DX20A (3.3V LVCMOS) Aux: DX20A (3.3V LVCMOS)	
Power Supply	Rated voltage: 100 V(ac) to 120 V(ac)/200 V(ac) to 240 V(ac) (Operating voltage is $-15\%/+10\%$ of rated voltage, however, lower limit is 90 V, upper limit is 250 V) Rated frequency: 50 Hz/60 Hz Power consumption: ≤ 1500 VA (include all options and modules)	
Dimensions and Mass	Dimensions: 426 (W) \times 265 (H) \times 578 (D) mm (excluding projections) Mass: ≤ 50 kg (including all options)	
Environmental Conditions	Operating temperature range: +5° to +40°C (without condensation) Storage temperature: -20° to +71°C (without condensation)	
CE	EMC	2014/30/EU, EN61326-1, EN61000-3-2
	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, EN50581
Laser Safety*	IEC 60825-1 Class 1 FDA 21CFR1040.10 and 1040.11 Excludes deviations caused by conformance to LASER Notice No.50 dated June 24, 2007	

*: Safety measures for laser products

This option complies with optical safety standards in IEC 60825-1, 21CFR1040.10 and 1040.11; the following descriptive labels are affixed to the product.



THIS PRODUCT COMPLIES WITH 21 CFR 1040.10 AND 1040.11 EXCEPT FOR DEVIATIONS PURSUANT TO LASER NOTICE NO. 50, DATED JUNE 24, 2007

Control Module MT8000A-001

External Interface	USB: USB (Type-B) Application Server: RJ-45 (1000Base-T) Control: RJ-45 (1000Base-T) Ethernet: RJ-45 (1000Base-T) Sync Input: BNC (f) (LVTTTL) Sync Output: BNC (f) (3.3 V LVCMOS)
--------------------	---

Multi-box Data Connection MT8000A-009

External Interface	Optical Port A1, A2, B1, B2: MPO optical adapter (m), 24 cores
--------------------	--

Radio Communication Test Station MT8000A Specifications

Baseband Module MT8000A-011

External Interface	Ethernet: RJ-45 (1000Base-T) SFP/SFP+: SFF-8431, SFF-8472 compliant IEEE 802.3ae-2002, IEEE 802.3-2008 compliant
--------------------	--

Data Test Module MT8000A-012

External Interface	Ethernet: RJ-45, 1000Base-T SFP/SFP+: SFF-8431, SFF-8472 compliant IEEE 802.3ae-2002, IEEE 802.3-2008 compliant
--------------------	---

RF Base Module MT8000A-020

IF Input/Output Connector	RF Converter B1, B2 Connector: N (f) Impedance: 50Ω (nom.)
External Interface	RF Converter A1, A2: Round multiway type connector TRX Switch 1, 2: BNC (f) (3.3 V LVCMOS)

0.4 GHz-6 GHz RF Sub Module MT8000A-021

General	<p>RF input/output connector Main 1, Main 2 Connector: N (f) Impedance: 50Ω (nom.) VSWR At 0.4 GHz ≤ setting frequency < 3 GHz ≤1.5 (0.4 GHz ≤ frequency < 3.1 GHz) At 3 GHz ≤ setting frequency ≤ 6 GHz ≤1.5 (2.9 GHz ≤ frequency ≤ 6.1 GHz)</p> <p>RF output connector Aux 1, Aux 2 Connector: N (f) Impedance: 50Ω (nom.) VSWR At 0.4 GHz ≤ setting frequency < 3 GHz ≤1.6 (0.4 GHz ≤ frequency < 3.1 GHz) At 3 GHz ≤ setting frequency ≤ 4.2 GHz ≤1.9 (2.9 GHz ≤ frequency ≤ 4.3 GHz) At 4.2 GHz < setting frequency ≤ 6 GHz ≤2.0 (4.1 GHz < frequency ≤ 6.1 GHz)</p>
---------	---

Radio Communication Test Station MT8000A Specifications

Transmission Characteristics	<p>Frequency Setting range: 0.4 GHz to 6 GHz Setting resolution: 1 Hz Accuracy: Depend on accuracy of reference oscillator</p> <p>Level Setting range Main 1, Main 2 -110 to -10 dBm (0.4 GHz ≤ setting frequency ≤ 6 GHz) Aux 1, Aux 2 -110 to 0 dBm (0.4 GHz ≤ setting frequency ≤ 6 GHz) Setting resolution: 0.1 dB</p> <p>Accuracy Main 1, Main 2 After Cal, with CW, 0.4 GHz ≤ setting frequency < 3 GHz, output level ≥ -100 dBm ±0.7 dB (typ.) ±1.0 dB (+18° to +28°C) ±1.3 dB (+5° to +40°C) After Cal, with CW, 3 GHz ≤ setting frequency ≤ 6 GHz, output level ≥ -100 dBm ±1.0 dB (+18° to +28°C) ±1.3 dB (+5° to +40°C) Aux 1, Aux 2 After Cal, with CW, 0.4 GHz ≤ setting frequency < 3 GHz, output level ≥ -100 dBm ±0.7 dB (typ.) ±1.0 dB (+18° to +28°C) ±1.3 dB (+5° to +40°C) After Cal, with CW, 3 GHz ≤ setting frequency ≤ 4.2 GHz, output level ≥ -100 dBm ±1.0 dB (+18° to +28°C) ±1.3 dB (+5° to +40°C) After Cal, with CW, 4.2 GHz < setting frequency ≤ 6 GHz, output level ≥ -100 dBm ±1.5 dB (+18° to +28°C) ±2.0 dB (+5° to +40°C)</p> <p>Signal purity Non-harmonic spurious With CW, 0.4 GHz ≤ setting frequency < 0.6 GHz, maximum output level, setting frequency ±10 MHz (exclude <0.4 GHz), exclude setting frequency ±2.5 MHz ≤-40 dBc With CW, 0.6 GHz ≤ setting frequency < 3.3 GHz, maximum output level, non-harmonic on setting frequency ±100 MHz, exclude setting frequency ±2.5 MHz ≤-40 dBc With CW, 3.3 GHz ≤ setting frequency ≤ 6 GHz, maximum output level, non-harmonic on setting frequency ±200 MHz, exclude setting frequency ±2.5 MHz ≤-40 dBc With CW, 0.4 GHz ≤ setting frequency < 0.6 GHz, maximum output level, 0.4 GHz ≤ non-harmonic frequency ≤ 6 GHz, exclude setting frequency ±10 MHz ≤-30 dBc With CW, 0.6 GHz ≤ setting frequency < 3.3 GHz, maximum output level, 0.4 GHz ≤ non-harmonic frequency ≤ 6 GHz, exclude setting frequency ±100 MHz ≤-30 dBc With CW, 3.3 GHz ≤ setting frequency ≤ 6 GHz, maximum output level, 0.4 GHz ≤ non-harmonic frequency ≤ 6.2 GHz, exclude setting frequency ±200 MHz ≤-30 dBc Harmonic spurious With CW, 0.4 GHz ≤ setting frequency ≤ 3 GHz, maximum output level ≤-25 dBc</p> <p>Maximum modulation bandwidth 20 MHz (0.4 GHz ≤ setting frequency < 0.6 GHz) 200 MHz (0.6 GHz ≤ setting frequency < 3.3 GHz) 400 MHz (3.3 GHz ≤ setting frequency ≤ 6 GHz)</p>
------------------------------	--

Radio Communication Test Station MT8000A Specifications

Receiving Characteristics	<p>Frequency Setting range: 0.4 GHz to 6 GHz Setting resolution: 1 Hz</p> <p>Level Maximum input level: +30 dBm, 0 VDC (0.4 GHz ≤ setting frequency ≤ 6 GHz, with CW) Setting range: -50 to +26 dBm Setting resolution: 0.1 dB</p> <p>Amplitude Measurement resolution: 0.01 dB Measurement accuracy After Cal, with CW, 0.4 GHz ≤ setting frequency < 3 GHz, measurement bandwidth is 100 MHz, at the signal equal to the setting frequency and the setting level ±0.5 dB (Setting level ≥ -20 dBm, typical) ±0.7 dB (Setting level ≥ -40 dBm, typical) ±1.0 dB (Setting level ≥ -40 dBm, +18° to +28°C) ±1.3 dB (Setting level ≥ -50 dBm, +18° to +28°C) After Cal, with CW, 3 GHz ≤ setting frequency ≤ 6 GHz, measurement bandwidth is 100 MHz, at the signal equal to the setting frequency and the setting level ±1.0 dB (Setting level ≥ -40 dBm, +18° to +28°C) ±1.3 dB (Setting level ≥ -50 dBm, +18° to +28°C)</p>
---------------------------	--

3 GHz-12 GHz RF Sub Module MT8000A-022, Extend RF 2.4 GHz-3 GHz MT8000A-023

General	<p>RF input/output connector Main 1, Main 2 Connector: N (f) Impedance: 50Ω (nom.) VSWR At 2.4 GHz ≤ setting frequency < 3 GHz, with MT8000A-023 ≤1.7 (2.3 GHz ≤ frequency < 3.1 GHz) At 3 GHz ≤ setting frequency ≤ 6 GHz ≤1.5 (2.9 GHz ≤ frequency ≤ 6.1 GHz)</p> <p>RF output connector Aux 1, Aux 2 Connector: N (f) Impedance: 50Ω (nom.) VSWR At 2.4 GHz ≤ setting frequency ≤ 4.2 GHz, with MT8000A-023 ≤1.8 (2.3 GHz ≤ frequency ≤ 4.3 GHz) 3 GHz ≤ setting frequency ≤ 4.2 GHz, without MT8000A-023 ≤1.8 (2.9 GHz ≤ frequency ≤ 4.3 GHz) At 4.2 GHz < setting frequency ≤ 6 GHz ≤2.0 (4.1 GHz < frequency ≤ 6.1 GHz)</p>
---------	---

Radio Communication Test Station MT8000A Specifications

Transmission Characteristics	<p>Frequency Setting range: 2 GHz to 12 GHz Setting resolution: 1 Hz Accuracy: Depend on accuracy of reference oscillator</p> <p>Level Setting range Main 1, Main 2 -110 to -10 dBm (2 GHz ≤ setting frequency ≤ 6 GHz) -110 to -18 dBm (6 GHz < setting frequency ≤ 12 GHz) Aux 1, Aux 2 -110 to 0 dBm (2 GHz ≤ setting frequency ≤ 6 GHz) -110 to -8 dBm (6 GHz < setting frequency ≤ 12 GHz) Setting resolution: 0.1 dB Accuracy Main 1, Main 2 After Cal, with CW, 2.4 GHz ≤ setting frequency < 3 GHz, output level ≥ -100 dBm, with MT8000A-023 ±0.7 dB (typ.) ±1.0 dB (+18° to +28°C) ±1.3 dB (+5° to +40°C) After Cal, with CW, 3 GHz ≤ setting frequency ≤ 6 GHz, output level ≥ -100 dBm ±1.0 dB (+18° to +28°C) ±1.3 dB (+5° to +40°C) Aux 1, Aux 2 After Cal, with CW, 2.4 GHz ≤ setting frequency < 3 GHz, output level ≥ -100 dBm, with MT8000A-023 ±0.7 dB (typ.) ±1.0 dB (+18° to +28°C) ±1.3 dB (+5° to +40°C) After Cal, with CW, 3 GHz ≤ setting frequency ≤ 4.2 GHz, output level ≥ -100 dBm ±1.0 dB (+18° to +28°C) ±1.3 dB (+5° to +40°C) After Cal, with CW, 4.2 GHz < setting frequency ≤ 6 GHz, output level ≥ -100 dBm ±1.5 dB (+18° to +28°C) ±2.0 dB (+5° to +40°C)</p> <p>Signal purity Non-harmonic spurious With CW, maximum output level, setting frequency ±100 MHz, exclude setting frequency ±2.5 MHz ≤ -40 dBc (2.4 GHz ≤ setting frequency ≤ 6 GHz, with MT8000A-023) ≤ -40 dBc (3 GHz ≤ setting frequency ≤ 6 GHz, without MT8000A-023) With CW, maximum output level, exclude setting frequency ±100 MHz ≤ -30 dBc (2.4 GHz ≤ setting frequency ≤ 6 GHz, 2.3 GHz ≤ non-harmonic frequency ≤ 6.1 GHz, with MT8000A-023) ≤ -30 dBc (3 GHz ≤ setting frequency ≤ 6 GHz, 2.9 GHz ≤ non-harmonic frequency ≤ 6.1 GHz, without MT8000A-023) Maximum modulation bandwidth: 200 MHz (2 GHz ≤ setting frequency ≤ 6 GHz) 1 GHz (6 GHz < setting frequency ≤ 12 GHz)</p>
Receiving Characteristics	<p>Frequency Setting range: 2 GHz to 12 GHz (Center frequency setting range of measurement software) Setting resolution: 1 Hz</p> <p>Level Maximum input level: +35 dBm, 0 VDC (2.4 GHz ≤ setting frequency ≤ 6 GHz, with CW, with MT8000A-023) +35 dBm, 0 VDC (3 GHz ≤ setting frequency ≤ 6 GHz, with CW, without MT8000A-023) +30 dBm, 0 VDC (6 GHz < setting frequency ≤ 12 GHz, with CW) Setting range: -50 to +26 dBm Setting resolution: 0.1 dB</p> <p>Amplitude Measurement resolution: 0.01 dB Measurement accuracy: At the signal equal to the setting frequency and the setting level After Cal, with CW, 2.4 GHz ≤ setting frequency < 3 GHz, measurement bandwidth is 100 MHz, with MT8000A-023 ±0.5 dB (Setting level ≥ -20 dBm, typ.) ±0.7 dB (Setting level ≥ -40 dBm, typ.) ±1.0 dB (Setting level ≥ -40 dBm, +18° to +28°C) ±1.3 dB (Setting level ≥ -50 dBm, +18° to +28°C) After Cal, with CW, 3 GHz ≤ setting frequency ≤ 6 GHz, measurement bandwidth is 100 MHz ±1.0 dB (Setting level ≥ -40 dBm, +18° to +28°C) ±1.3 dB (Setting level ≥ -50 dBm, +18° to +28°C)</p>

Radio Communication Test Station MT8000A Specifications

28 GHz RF Converter MA80001A

RF Input/Output Connector	Port 1, Port 2 Connector: K (m) Impedance: 50Ω (nom.) VSWR (when transmitted): ≤ 2.5 (23.75 GHz \leq frequency \leq 30 GHz) VSWR (when received): ≤ 2.5 (23.45 GHz \leq frequency \leq 30.3 GHz)	
Transmission Characteristics	Frequency Setting range: 24.25 GHz to 29.5 GHz (Center frequency setting range of measurement software) Setting resolution: 1 Hz Accuracy: Depend on accuracy of MT8000A reference oscillator Level Setting range: -90 to +5 dBm Setting resolution: 0.1 dB Accuracy: ± 1.5 dB (+18° to +28°C, after Cal, with CW) Signal purity Non-harmonic spurious With CW, maximum output level ≤ -40 dBc (non-harmonic on setting frequency ± 500 MHz, non-harmonic, exclude setting frequency ± 50 MHz) ≤ -30 dBc (23.75 GHz \leq non-harmonic frequency \leq 30 GHz, exclude setting frequency within ± 500 MHz and -4500 MHz) Maximum modulation bandwidth: 1 GHz	
Receiving Characteristics	Frequency Setting range: 24.25 GHz to 29.5 GHz (Center frequency setting range of measurement software) Setting resolution: 1 Hz Level Maximum input level: +20 dBm, 0 VDC (with CW) Setting range: -70 to +5 dBm Setting resolution: 0.1 dB Amplitude Measurement resolution: 0.01 dB Measurement accuracy: At the signal equal to the setting frequency and the setting level After Cal, with CW, 24.25 GHz \leq setting frequency \leq 29.5 GHz, measurement bandwidth 100 MHz, +18° to +28°C ± 1.5 dB (-50 dBm \leq setting level \leq +5 dBm) ± 2.5 dB (-70 dBm \leq setting level $<$ -50 dBm)	
IF Input/Output Connector	Connect to MT8000A: B Connector: N (f) Impedance: 50Ω (nom.)	
External Control Connector	Round multiway type connector	
DC Input Connector	Voltage: 12 VDC Current: ≤ 3 A	
Dimensions and Mass	Dimensions: 92 (W) \times 175 (H) \times 260 (D) mm (excluding projections) Mass: ≤ 6 kg	
Environmental Conditions	Operating temperature range: +5°C to +40°C (without condensation) Storage temperature range: -20°C to +71°C (without condensation)	
CE	EMC	2014/30/EU, EN61326-1, EN61000-3-2
	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, EN50581

Radio Communication Test Station MT8000A Specifications

39 GHz RF Converter MA80002A

RF Input/Output Connector	Port 1, Port 2 Connector: K (m) Impedance: 50Ω (nom.) VSWR: ≤2.9 (36.2 GHz ≤ frequency ≤ 40.0 GHz)	
Transmission Characteristics	<p>Frequency Setting range: 37.0 GHz to 42.5 GHz (Center frequency setting range of measurement software) Setting resolution: 1 Hz Accuracy: Depend on accuracy of MT8000A reference oscillator</p> <p>Level Setting range: -90 to +5 dBm Setting resolution: 0.1 dB Accuracy: ±1.5 dB (typ., after Cal, with CW, 37.0 GHz ≤ setting frequency ≤ 40.0 GHz) ±2.0 dB (+18° to +28°C, after Cal, with CW, 37.0 GHz ≤ setting frequency ≤ 40.0 GHz)</p> <p>Signal purity Non-harmonic spurious With CW, maximum output level, 37.0 GHz ≤ setting frequency ≤ 40.0 GHz ≤-40 dBc (non-harmonic on setting frequency ±500 MHz, exclude non-harmonic frequency >40.0 GHz and setting frequency ±50 MHz) ≤-30 dBc (36.5 GHz ≤ non-harmonic frequency ≤ 40.0 GHz, exclude setting frequency ±500 MHz) Maximum modulation bandwidth: 1 GHz</p>	
Receiving Characteristics	<p>Frequency Setting range: 37.0 GHz to 42.5 GHz (Center frequency setting range of measurement software) Setting resolution: 1 Hz</p> <p>Level Maximum input level: +17 dBm, 0 VDC (with CW) Setting range: -70 to +5 dBm Setting resolution: 0.1 dB</p> <p>Amplitude Measurement resolution: 0.01 dB Measurement accuracy: At the signal equal to the setting frequency and the setting level After Cal, with CW, 37.0 GHz ≤ setting frequency ≤ 40.0 GHz, measurement bandwidth 100 MHz ±1.5 dB (-50 dBm ≤ setting level ≤ +5 dBm, typ.) ±2.0 dB (-70 dBm ≤ setting level < -50 dBm, typ.) ±2.0 dB (-50 dBm ≤ setting level ≤ +5 dBm, +18° to +28°C) ±2.5 dB (-70 dBm ≤ setting level < -50 dBm, +18° to +28°C)</p>	
IF Input/Output Connector	Connect to MT8000A: B Connector: N (f) Impedance: 50Ω (nom.)	
External Control Connector	Round multiway type connector	
DC Input Connector	Voltage: 12 VDC Current: ≤4 A	
Dimensions and Mass	Dimensions: 92 (W) × 175 (H) × 304 (D) mm (excluding projections) Mass: ≤6 kg	
Environmental Conditions	Operating temperature range: +5° to +40°C (without condensation) Storage temperature: -20° to +71°C (without condensation)	
CE	EMC	2014/30/EU, EN61326-1, EN61000-3-2
	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, EN50581

Radio Communication Test Station MT8000A Specifications

Shield Box MA8161A

Electrical Characteristics	Shielding characteristics: without cable connection via USB connector or Through Hole ≥50 dB (600 MHz ≤ frequency ≤ 6 GHz) ≥50 dB (24 GHz < frequency ≤ 43.5 GHz) (nom.)	
Input/Output Connector	When Connector Panel 1 MA8161A-001 is selected SMA (f) — SMA (f): 2 K (f) — K (f): 2 USB 3.0 Type-A (f) — USB 3.0 Type-A (f): 1 When Connector Panel 2 MA8161A-002 is selected SMA (f) — SMA (f): 8 K (f) — K (f): 8 Through Hole: 2	
Dimensions and Mass	Outer dimensions: 434 (W) × 271 (H) × 328 (D) mm (excluding projections) Maximum test UE size : 300 (W) × 50 (H) × 200 (D) mm (set the UE antenna face down) Ventilation hole: 2	
Environmental Conditions	Operating temperature range: +5° to +40°C Storage temperature range: -20° to +60°C (without condensation)	
CE	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, EN50581

RF Chamber MA8171A


Electrical Characteristics	Shielding characteristics ≥70 dB (800 MHz ≤ frequency ≤ 3.8 GHz) (nom.) ≥60 dB (24 GHz ≤ frequency ≤ 40 GHz) (nom.) Anechoic performance Reflected wave Level by free space standing wave ratio method in QZ (quiet zone) in φ 300 mm sphere ≥30 dB (24 GHz ≤ frequency ≤ 40 GHz) (nom.)	
General	External Interface RF connection: K (f) × 2 SMA (f) × 4 UE connection: USB 2.0 (type-A) (f) × 2 Position Controller: mini D-Sub 15 pin (m) × 2 Internal interface RF connection: K (f) × 2 SMA (f) × 4 UE connection: USB 2.0 (type-A) (f) × 2 Positioner connection: mini D-Sub 15 pin (f) × 2 Through sleeve pipe: 1 (φ50 mm) Door: Unilateral door (left side opening) Outside door size: 1100 (W) × 800 (H) mm Aperture: 1000 (W) × 700 (H) mm Blank panel: 6 Ventilation hole: 2	
Dimensions and Mass	Outer dimensions: 1460 (W) × 1210 (H) × 1000 (D) mm (excluding projections) Effective inner dimension: 1100 (W) × 800 (H) × 650 (D) mm (Inside dimension with radio wave absorber stuck) Mass: ≤150 kg Outer dimensions (with chamber rack): 1460 (W) × 1785 (H) × 1000 (D) mm (including casters, excluding projections) Mass (with chamber rack): ≤240 kg	

Position Controller MA8174A

External Interface	GPIB Trigger output: BNC (5 V, TTL, negative logic, pulse width 20 μs) × 1 Control connector: mini D-Sub 15 pin (f) × 2	
Dimensions and Mass	Dimensions: 434 (W) × 141 (H) × 363 (D) mm Mass: ≤15 kg Rated voltage: 100 V(ac) to 120 V(ac)/200 V(ac) to 240 V(ac) Rated frequency: 50 Hz to 60 Hz Power consumption: ≤110 VA (when Positioner MA8175A connected)	
Environmental Conditions	Operating temperature range: +5° to +40°C (without condensation) Operating humidity range: ≤85% (without condensation) Storage temperature range: -20° to +60°C (without condensation) Storage humidity range: ≤85% (without condensation)	
CE	EMC	2014/30/EU, EN61326-1, EN61000-3-2
	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, EN50581

Radio Communication Test Station MT8000A Specifications

Positioner MA8175A

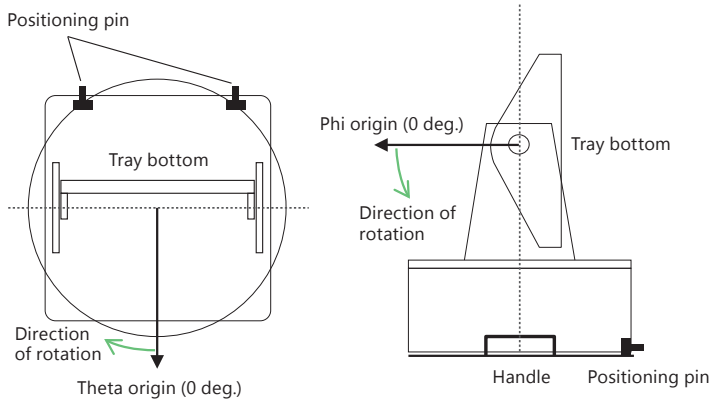General	<p>Axis of rotation: 2 (Theta: Horizontal rotation, Phi: Vertical rotation) Rotational speed: 1.0 rpm to 15.0 rpm, 0.1 rpm step (nom.) Rotation angle resolution (Setting resolution): 0.1 deg. (nom.) Stop precision (Reproducibility): Specified stopping precision reproducibility when the center of gravity of UE of 1 kg or less is at rotation center Theta: ± 0.5 deg. (nom.) Phi: ± 0.5 deg. (nom.) Angle of rotation Theta: -20.0 deg. to 380.0 deg. (finite rotation) Phi: 0.0 to 359.9 deg. (infinite rotation), -720.0 deg. to 720.0 deg. (finite rotation) Angle origin Theta: According to figure below (left) Phi: According to figure below (right)</p>  <p>Allowable torque: $10 \text{ N} \cdot \text{m}$ (nom.) UE allowable size: Tray size within 400×400 mm, 200 mm or less from the bottom of the tray UE allowable mass: 1 kg Noise: ≤ 70 dB (Conforms to Machinery Directive 2006/42/EC Annex I)</p>	
External Connector	<p>Theta: mini D-Sub 15 pin connector (m), 0.8 m from the end of the positioner body Phi: mini D-Sub 15 pin connector (m), 0.8 m from the end of the positioner body</p>	
Dimensions and Mass Power Supply	<p>Dimensions: 600 (W) \times 715 (H) \times 600 (D) mm (excluding projections and cable) Tray size: 400 (W) \times 400 (D) mm (excluding projections and screw) 70 (depth) mm (from the center of rotation to the bottom of the tray) Mass: ≤ 25 kg Power: Supplied from Position Controller MA8174A</p>	
Environmental Conditions	<p>Operating temperature range: $+5^\circ$ to $+40^\circ\text{C}$ (without condensation) Operating humidity range: $\leq 85\%$ (without condensation) Storage temperature range: -20° to $+60^\circ\text{C}$ (without condensation) Storage humidity range: $\leq 85\%$ (without condensation)</p>	
CE	EMC	2014/30/EU, EN61326-1, EN61000-3-2
	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, EN50581
	Machinery	2006/42/EC, EN60204-1

Radio Communication Test Station MT8000A Specifications

28 GHz Test Antenna MA8181A

Electrical Characteristics	Frequency: 23 GHz to 31 GHz Impedance: 50Ω (nom.) VSWR: ≤2.0 Polarization: Both (Vertical, Horizontal) (nom.) Gain: ≥13.5 dBi (at 28 GHz) (nom.) Half-power beam width (3 dB): ≥14 deg. (at 28 GHz, E-plane, H-plane) (nom.) Cross polarization ratio: <-15 dB (at 28 GHz) (nom.) Port to port isolation: >20 dB
General	RF Input/Output Connector Vertically polarized wave connector: Phi port (↑), K (f) Horizontally polarized wave connector: Theta port (→), K (f) Dimensions: 190 (W) × 190 (H) × 210 (D) mm (excluding projections) Mass: ≤1.3 kg

Typical (typ.): Performance not warranted. Must products meet typical performance.
Nominal (nom.): Values not warranted. Included to facilitate application of product.

Radio Communication Test Station MT8000A Ordering Information

Please specify the model/order number, name and quantity when ordering.
The names listed in the chart below are Order Names. The actual name of the item may differ from the Order Name.

Model/Order No.	Name
MT8000A	Main Frame Radio Communication Test Station
	Standard Accessories
J1211	Power Cord (3.0 m, 100 V, 3 core) : 1 pc
J1440A	LAN Cable : 1 pc
W3955AE	MT8000A Operation Manual (DVD) : 1 pc
MX800000A	Platform Software
	Options
MT8000A-001	Control Module
MT8000A-009	Multi-box Data Connection
MT8000A-011	Baseband Module
MT8000A-012	Data Test Module
MT8000A-020	RF Base Module
MT8000A-021	0.4 GHz-6 GHz RF Sub Module
MT8000A-022	3 GHz-12 GHz RF Sub Module
MT8000A-023	Extend RF 2.4 GHz-3 GHz
	Converter
MA80001A	28 GHz RF Converter
MA80002A	39 GHz RF Converter
J1771A	Coaxial Cord (N-N, 1.0 m)
J1771B	Coaxial Cord (N-N, 3.0 m)
J1772A	Control Cable, 1.0 m
J1772B	Control Cable, 3.0 m
	OTA Measurement Hardwares
MA8161A	Shield Box
MA8161A-001	Control Panel 1
MA8161A-002	Control Panel 2
Z1999A	28 GHz Antenna Unit
Z2000A	39 GHz Antenna Unit
MA8171A	RF Chamber
MA8174A	Position Controller
MA8175A	Positioner
MA8175A-AK001	Cable Management Kit
MA8181A	28 GHz Test Antenna
Z1996A	28 GHz/39 GHz Test Antenna
B0746A	Chamber Rack
B0747A	Converter Rack
B0750A	Anchor Plate
J0322A	Coaxial Cord, 0.5M
J0322B	Coaxial Cord, 1.0M
J0322C	Coaxial Cord, 1.5M
J0322D	Coaxial Cord, 2.0M
J1762A	Positioner Control Cable (3.0 m)
J1775A	Coaxial Cable (KM-KM, 0.3 m)
J1775B	Coaxial Cable (KM-KM, 1.0 m)
J1775C	Coaxial Cable (KM-KM, 2.0 m)
J1775D	Coaxial Cable (KM-KM, 3.0 m)
J1795A	Coaxial Cable (SMA (M)-SMA (M), 0.5 m)
J1795B	Coaxial Cable (SMA (M)-SMA (M), 1.0 m)
J1795C	Coaxial Cable (SMA (M)-SMA (M), 1.5 m)
J1795D	Coaxial Cable (SMA (M)-SMA (M), 2.0 m)
Z1983A	Tray
Z1984A	Jig for DUT Tray
Z1985A	Wave Absorber
Z1986A	Hook and Loop Fastener
Z2009A	Link Antenna
B0752A	Link Antenna Holder
J1798A	GPIB-USB-HS+

Model/Order No.	Name
	Correction Equipments for OTA Measurement
ML2437A	Power Meter
MA2444D	Power Sensor
MA2445D	Power Sensor
41KC-10	10 dB Attenuator
J0004	COAXIAL ADAPTOR
J0008	GPIB CABLE, 2.0M
K222B	Adaptor
Z1974A	Reference Antenna
	Measurement Hardware for NSA
MT8821C	Radio Communication Analyzer
MT8821C-008	LTE Measurement Hardware
MX882112C	LTE FDD Measurement Software
MX882112C-010	LTE FDD NSA for 5G Anchor
MX882113C	LTE TDD Measurement Software
MX882113C-010	LTE TDD NSA for 5G Anchor
MN8110B	I/O ADAPTER
J1802A	Sync Cable
MD8430A	Signalling Tester
MD8430A-005	Extended Frequency Range to 3.8 GHz Hardware2
MD8430A-035	LTE Enhanced Test Mode I(ETM)
MD8430A-060	LTE FDD Option
MD8430A-061	LTE TDD Option
MD8430A-064	LTE Anchor For 5G NSA Option
MD8430A-086	Ciphering Option
MD8430A-SS135	1 Year Support Service for LTE FDD (ETM)
MD8430A-SS136	1 Year Support Service for LTE TDD (ETM)
	Application Parts
Z2017A	Standard PC
Z1320E	Standard PC for RTD (with monitor)
Z1591A	USB Dongle (Protocol)
G0356A	8G FC/10G SR 850 nm SFP+
J1581A	Optical cable MM LC/PC to LC/PC 3 meter
Z1993A	Optical Connector Cleaner (MPO)
J0127A	COAXIAL CORD, 1.0M
J1398A	N-SMA ADAPTOR
J1440A	LAN Cable
J1773A	AUX Conversion Adapter

Radio Communication Test Station MT8000A Ordering Information

Model/Order No.	Name
	Software Options
MX800010A	NR TDD Measurement Software
MX800010A-002	NR TDD OTA Measurement Software
MX800010A-007	NR TDD sub-6 GHz Measurement
MX800010A-008	NR TDD mmWave Measurement
MX800010A-031	NR TDD DL 2x2 MIMO Up To Total BW 100 MHz
MX800010A-032	NR TDD DL 2x2 MIMO Up To Total BW 200 MHz
MX800010A-033	NR TDD DL 2x2 MIMO Up To Total BW 400 MHz
MX800010A-041	NR TDD DL 2CA For Rx Measurement
MX800010A-042	NR TDD DL 3CA For Rx Measurement
MX800010A-043	NR TDD DL 4CA For Rx Measurement
MX800010A-044	NR TDD DL 5CA For Rx Measurement
MX800010A-045	NR TDD DL 6CA For Rx Measurement
MX800010A-046	NR TDD DL 7CA For Rx Measurement
MX800010A-047	NR TDD DL 8CA For Rx Measurement
MX800030A	NR Protocol Platform Software
MX800030A-001	NR TDD Platform
MX800030A-031	NR DL 2x2 MIMO BW 50 MHz Per Cell
MX800030A-032	NR DL 2x2 MIMO BW 100 MHz Per Cell
MX800030A-051	NR DL 2CA For Protocol
MX800030A-052	NR DL 3CA For Protocol
MX800030A-053	NR DL 4CA For Protocol
MX800030A-054	NR DL 5CA For Protocol
MX800030A-055	NR DL 6CA For Protocol
MX800030A-056	NR DL 7CA For Protocol
MX800030A-057	NR DL 8CA For Protocol
MX800050A	Rapid Test Designer Platform (RTD)
MX800050A-001	5G NSA Framework For RTD
MX800050A-002	RTD LL/L3 Procedure Libraries (5G)
MX800050A-003	Core LTE Framework For RTD
MX800050A-004	UTRAN/GERAN Framework For RTD
MX800050A-005	IMS Framework For RTD
MX800050A-006	IoT Framework For RTD
MX800050A-007	LTE-A Framework For RTD
MX800050A-008	LTE-A Pro Framework For RTD
MX800050A-009	LTE MIMO Framework For RTD
MX800050A-010	LTE Unlicensed Framework For RTD
MX800050A-011	LTE/UTRAN/GERAN Fading Library For RTD
MX800050A-014	eMBMS Framework For RTD
MX800050A-040	RTD Test Creation and Editing Tools
MX800050A-041	RTD Test Execution Tools
MX800050A-042	RTD Protocol Analyzer
MX800050A-051	RTD Floating (Server Based) License
	Support Services
MX800010A-SS101	5G NR RF Measurement Support Service (Per Year)
MX800010A-SS102	5G NR RF OTA Measurement Support Service (Per Year)
MX800050A-SS100	RTD Support Service (Per Year)
MX800050A-SS101	5G NSA Support Service (Per Year)
MX800050A-SS103	LTE Support Service (Per Year)
MX800050A-SS104	UTRAN/GERAN Support Service (Per Year)
MX800050A-SS105	IMS Support Service (Per Year)
MX800050A-SS106	IoT Support Service (Per Year)
MX800050A-SS107	LTE-A Support Service (Per Year)
MX800050A-SS108	LTE-A Pro Support Service (Per Year)
MX800050A-SS109	MIMO Support Service (Per Year)
MX800050A-SS110	LTE Unlicensed Support Service (Per Year)
MX800050A-SS111	LTE/UTRAN/GERAN Fading Support Service (Per Year)
MX800050A-SS114	eMBMS Support Service (Per Year)
	Warranty Services
MT8000A-ES210	2 Years Extended Warranty Service
MT8000A-ES310	3 Years Extended Warranty Service
MT8000A-ES510	5 Years Extended Warranty Service
MA80001A-ES210	2 Years Extended Warranty Service
MA80001A-ES310	3 Years Extended Warranty Service
MA80001A-ES510	5 Years Extended Warranty Service
MA80002A-ES210	2 Years Extended Warranty Service
MA80002A-ES310	3 Years Extended Warranty Service
MA80002A-ES510	5 Years Extended Warranty Service

Related Products



Radio Communication Analyzer
MT8821C



Signalling Tester
MD8430A



Shield Box
MA8161A



RF Chamber
MA8171A

- **United States**

- **Anritsu Americas Sales Company**

450 Century Parkway, Suite 190, Allen,
TX 75013 U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

- **Canada**

- **Anritsu Electronics Ltd.**
700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

- **Brazil**

- **Anritsu Eletronica Ltda.**
Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP
Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

- **Mexico**

- **Anritsu Company, S.A. de C.V.**
Blvd Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

- **United Kingdom**

- **Anritsu EMEA Ltd.**
200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

- **France**

- **Anritsu S.A.**
12 avenue du Québec, Bâtiment Iris 1- Silic 612,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

- **Germany**

- **Anritsu GmbH**
Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

- **Italy**

- **Anritsu S.r.l.**
Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

- **Sweden**

- **Anritsu AB**
Isafjordsgatan 32C, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00

- **Finland**

- **Anritsu AB**
Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

- **Denmark**

- **Anritsu A/S**
Torveporten 2, 2500 Valby, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

- **Russia**

- **Anritsu EMEA Ltd.**
Representation Office in Russia
Tverskaya str. 16/2, bld. 1, 7th floor.
Moscow, 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

- **Spain**

- **Anritsu EMEA Ltd.**
Representation Office in Spain
Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 5
28046, Madrid, Spain
Phone: +34-915-726-761
Fax: +34-915-726-621

- **United Arab Emirates**

- **Anritsu EMEA Ltd.**
Dubai Liaison Office
902, Aurora Tower,
P O Box: 500311- Dubai Internet City
Dubai, United Arab Emirates
Phone: +971-4-3758479
Fax: +971-4-4249036

- **India**

- **Anritsu India Private Limited**
6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road, Bengaluru – 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

- **Singapore**

- **Anritsu Pte. Ltd.**
11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

- **P.R. China (Shanghai)**

- **Anritsu (China) Co., Ltd.**
Room 2701-2705, Tower A,
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

- **P.R. China (Hong Kong)**

- **Anritsu Company Ltd.**
Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

- **Japan**

- **Anritsu Corporation**
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

- **Korea**

- **Anritsu Corporation, Ltd.**
5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13494 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

- **Australia**

- **Anritsu Pty. Ltd.**
Unit 20, 21-35 Ricketts Road,
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

- **Taiwan**

- **Anritsu Company Inc.**
7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817